




EVO BLINDER 700 IP PIX
BLINDER DIGITAL BAR

EVO Blinder 700 PIX IP

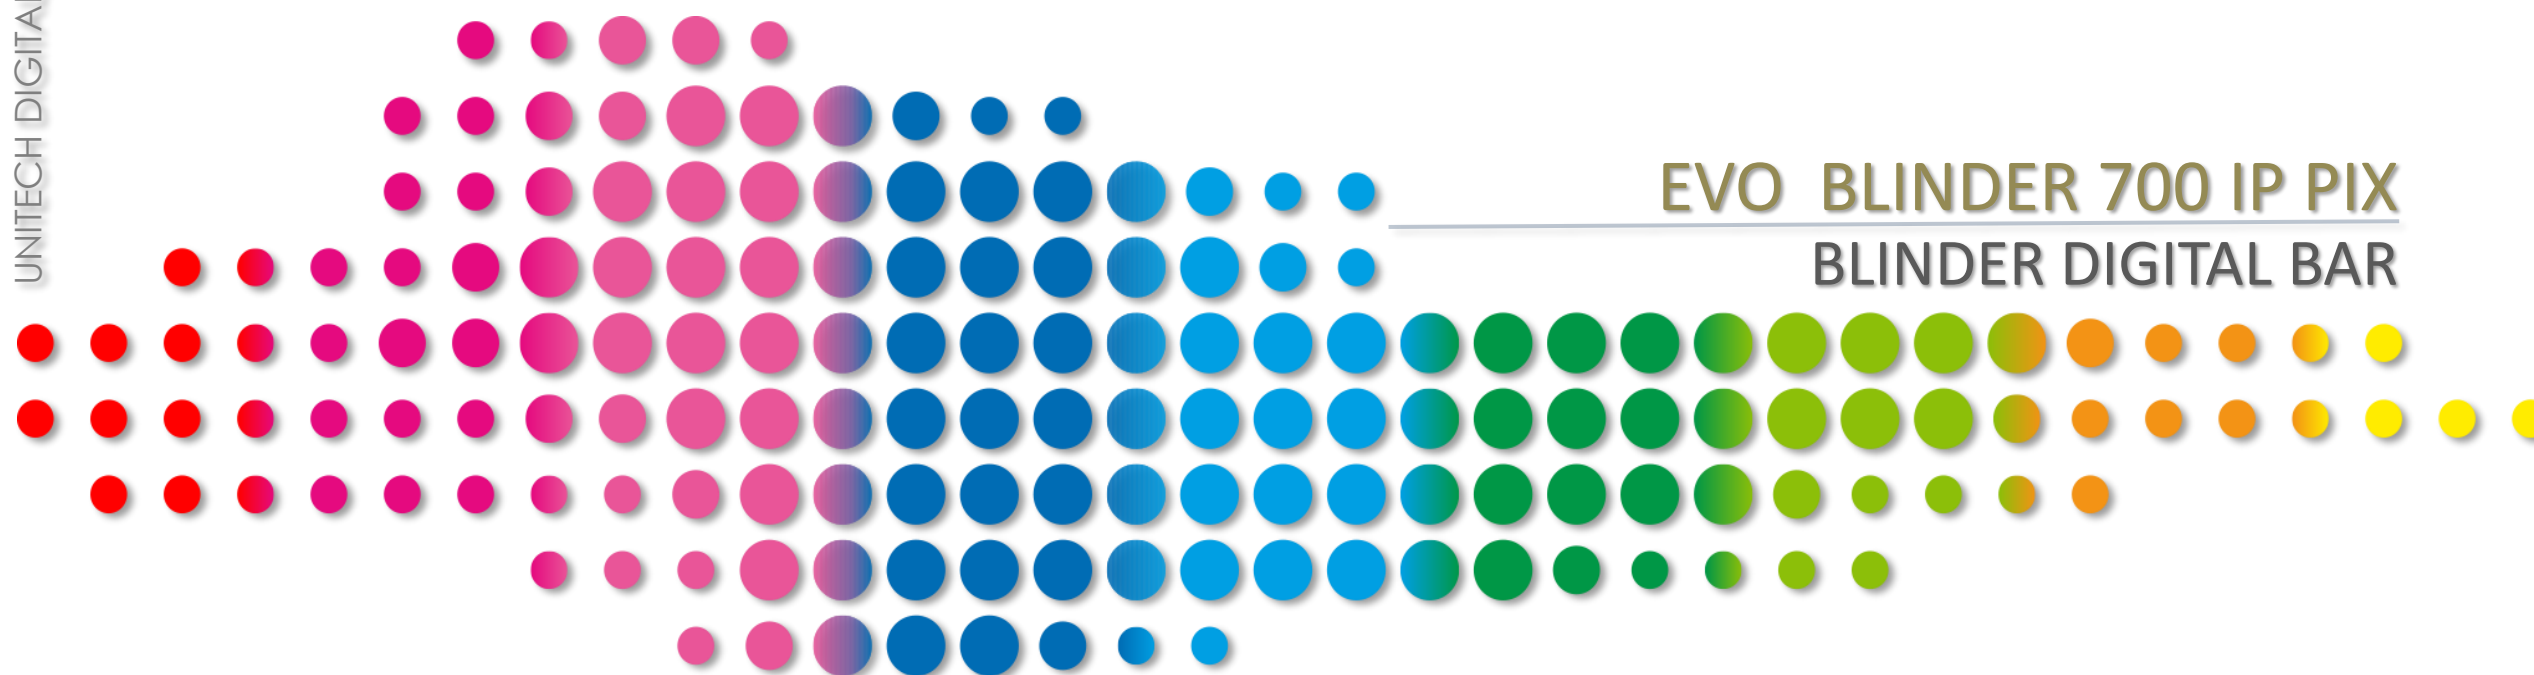

LIGHT SOURCE

Strobe Panel LEDs

LED Type: 5050SMD 2W RGBW 4 in 1

LED Count: 242

LED Colors: Cool-White

LED Segments: 32 (2x16)

Strobe Tube LEDs

LEDs Type: 3535 5W 6500K LEDs

LED Count: 144

LED Colors: Cool-White

LED Segments: 16

Working lifetime 50000h

ELECTRICAL AND CONNECTORS

Input Voltage Range: AC 100V/120V/200V/220V
/230V/240V 50/60Hz

Power Consumption : 700W@220V

Connector Power : Seetronic Powercon Ture1

Connector DMX: Seetronic XLR Cable Connector

CONTROL

Dimmer :0-100% linear dimming

Electric strobe: 0.3-20pcs/sec Max 20 Hz

Control mode:

International standard DMX 512signal, 3 Pin (5 Pin)

DMX512 interface RDM

Wireless : 2.4 GHz W-DMX™ (optional)

3 channel modes

Master-slave

Stand-alone mode


Self-test mode

Adjustable horizontal and vertical speed Display


fixture using time

Display software version number

Modular structure for easy maintenance Speed-regulating radiator N

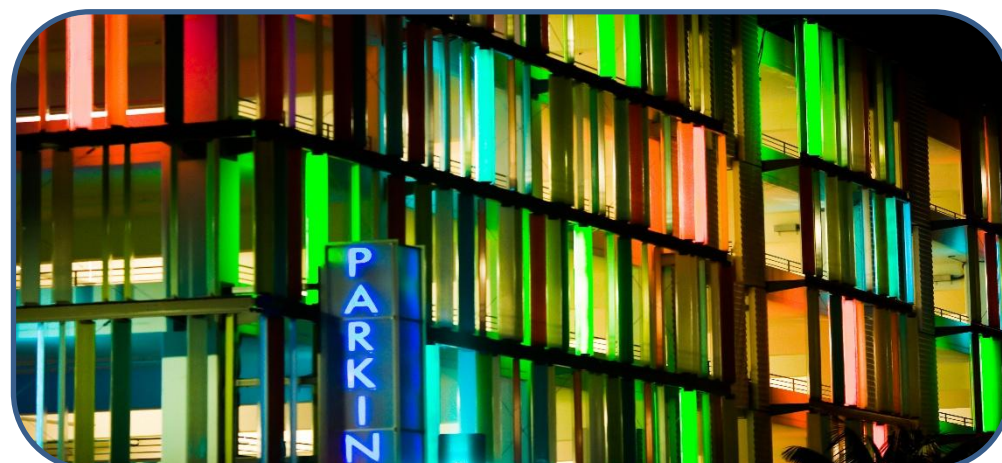

EVO Blinder 700 PIX IP

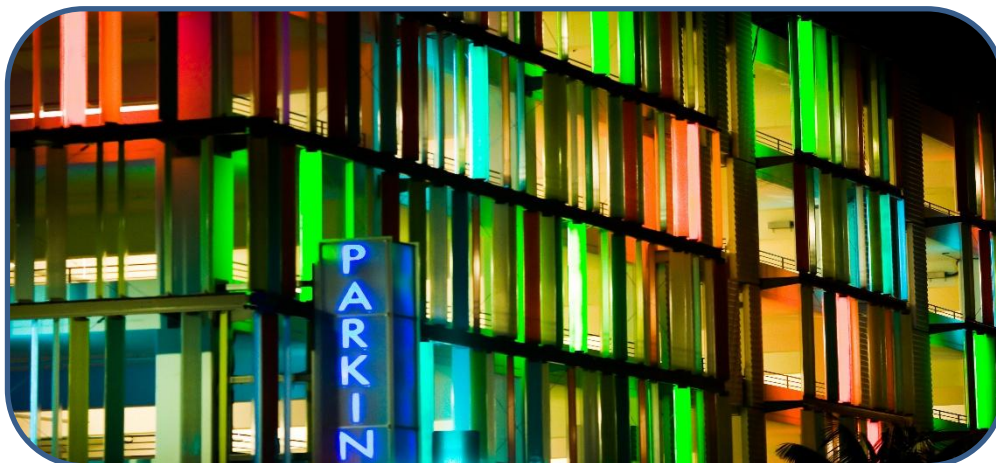

EVO Blinder 700 PIX IP





PHYSICAL INFORMATION



Fixture Dimensions: 1000X181X88mm

Weight: 8.9 kg

IP Rated: IP65

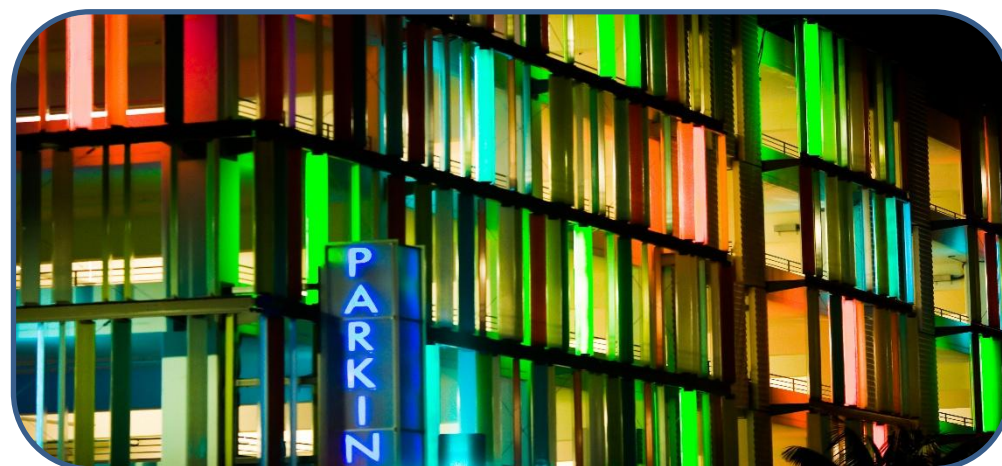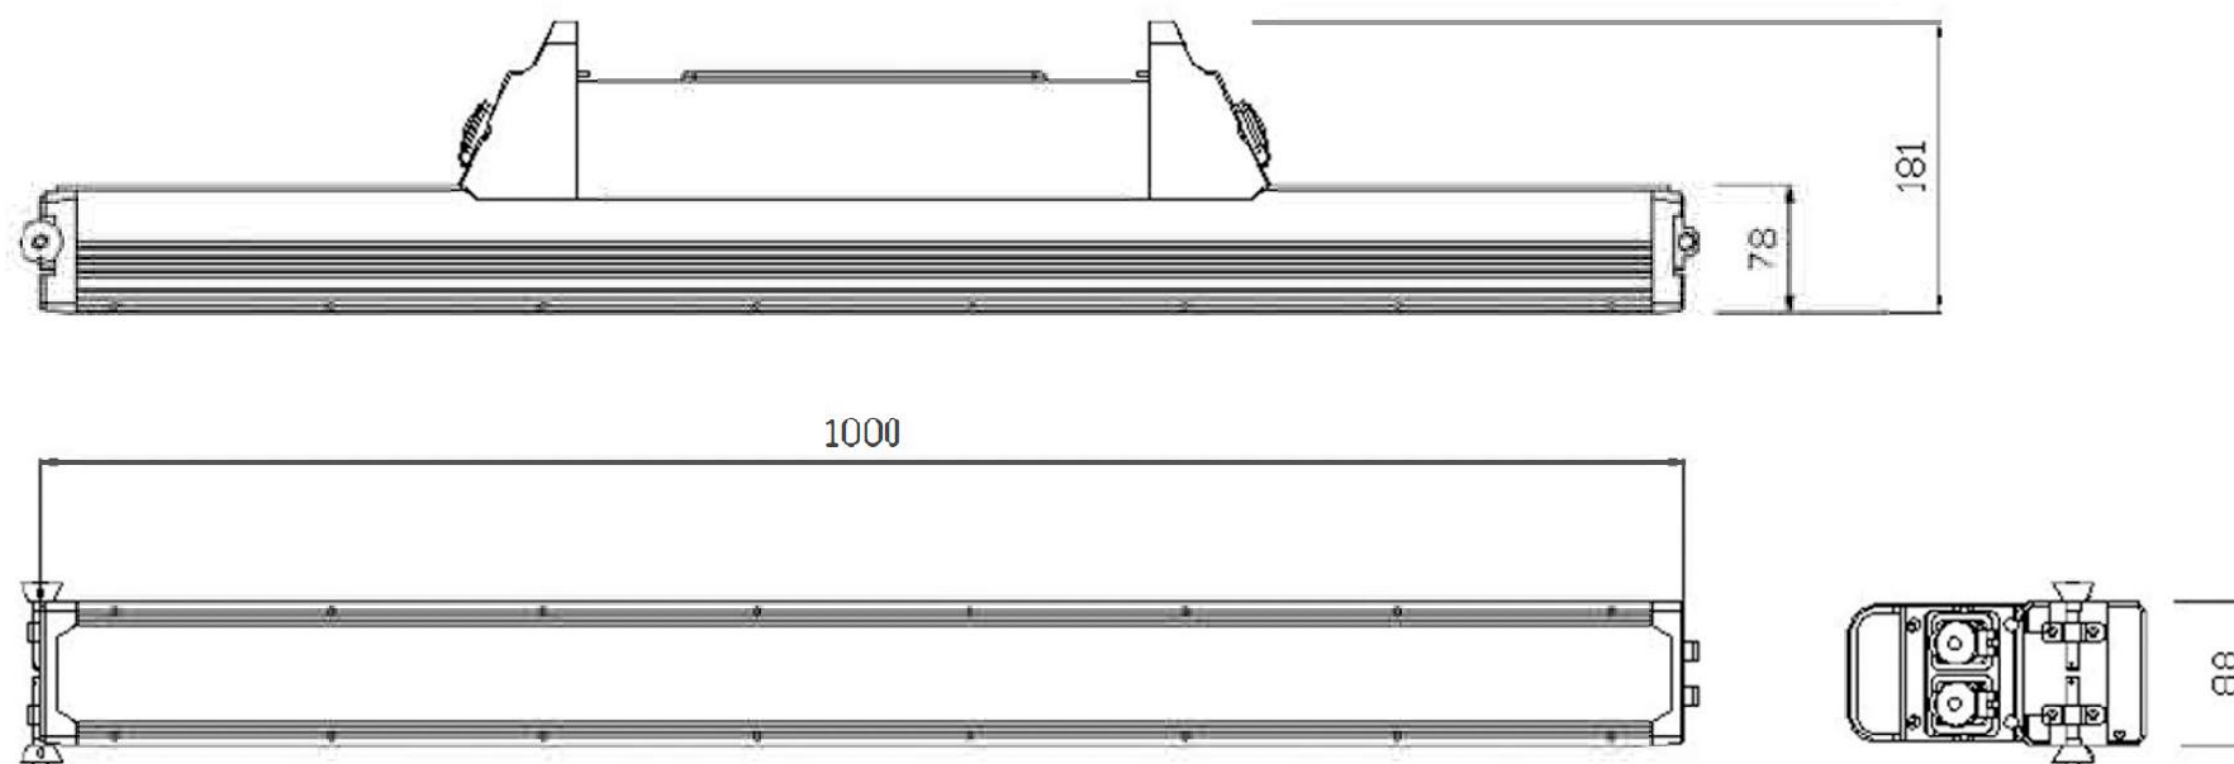

EVO Blinder 700 PIX IP

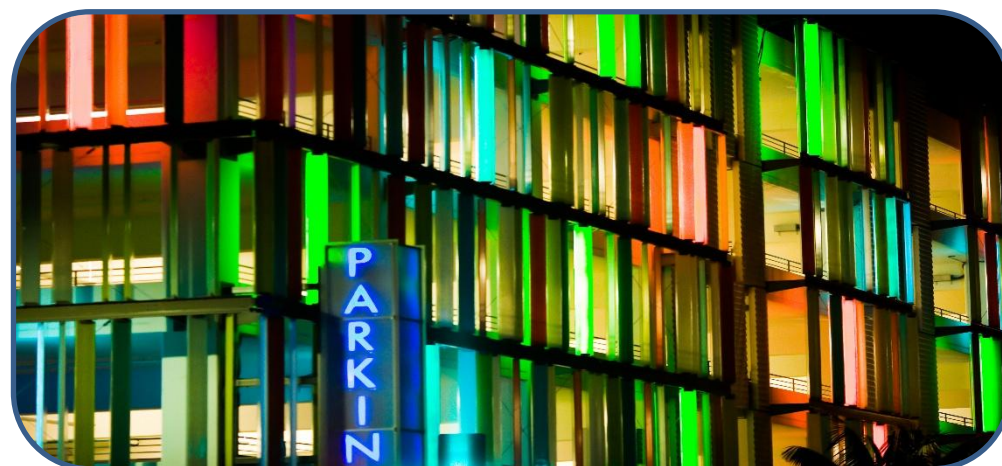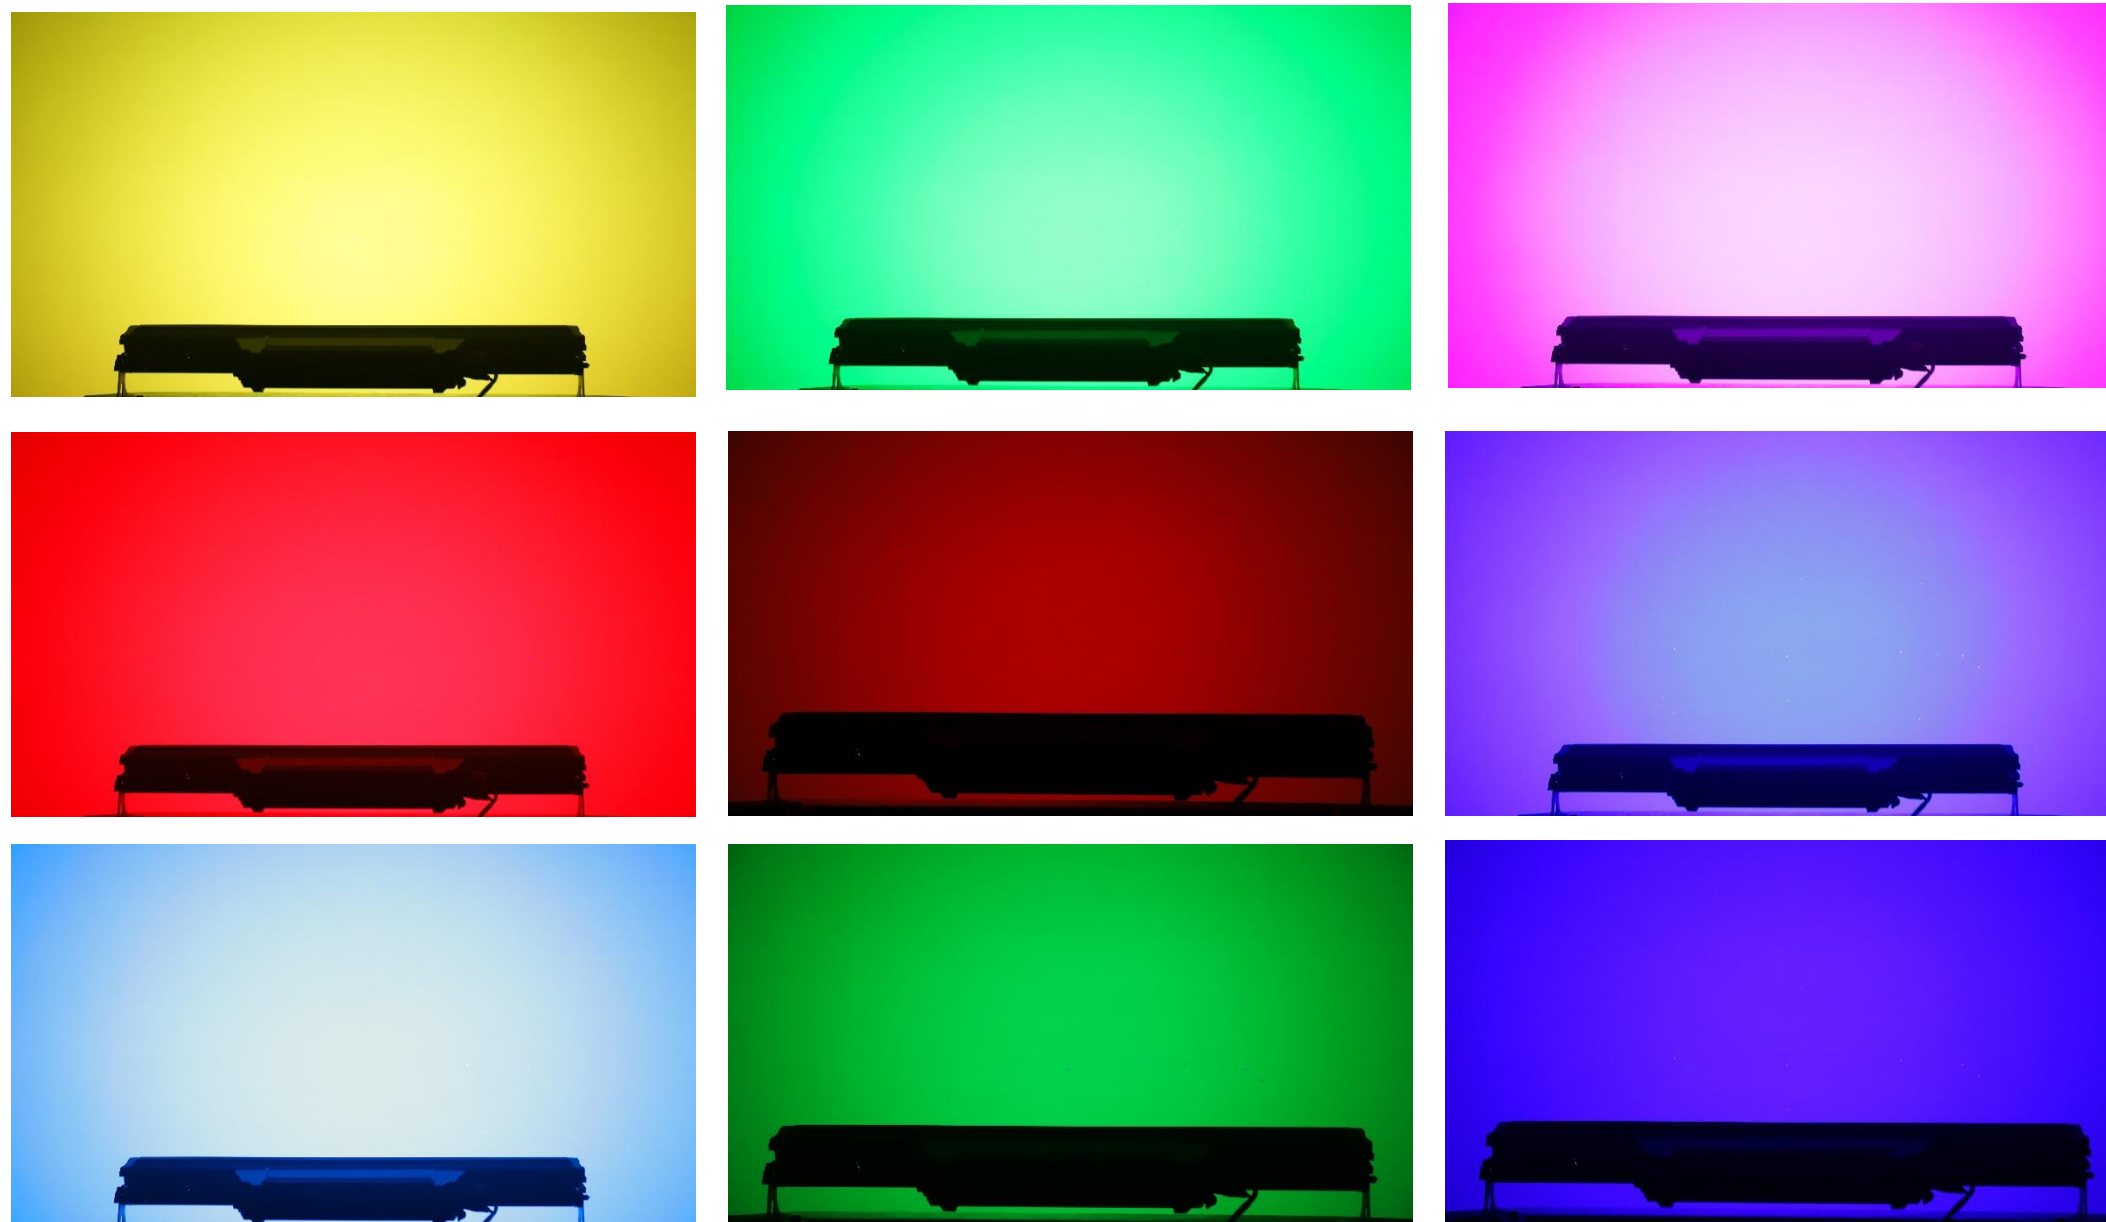

EVO Blinder 700 PIX IP



ORDERS CODE:



NAME: EVO 1960 WB UP PIX RGBW
Net Weight: 8.9 Kg
Size: 100X80X181 mm

PART#: UNIEVOBLINDER700IP



NAME: GANCIO ALISCAFF
Net Weight: 0.548 Kg
MAX.load: 200Kg

PART#: UNIALISCMONO200KG



NAME: FLY CASE EVO BLINDER 700 PIX IP
Q'TY: 04 PCS
N.W.: 37.7 Kg
MEAS: 106x580x500 mm
PART#: UNIFLYCSEVO700

