




EVO WASH 1000 IP PIX

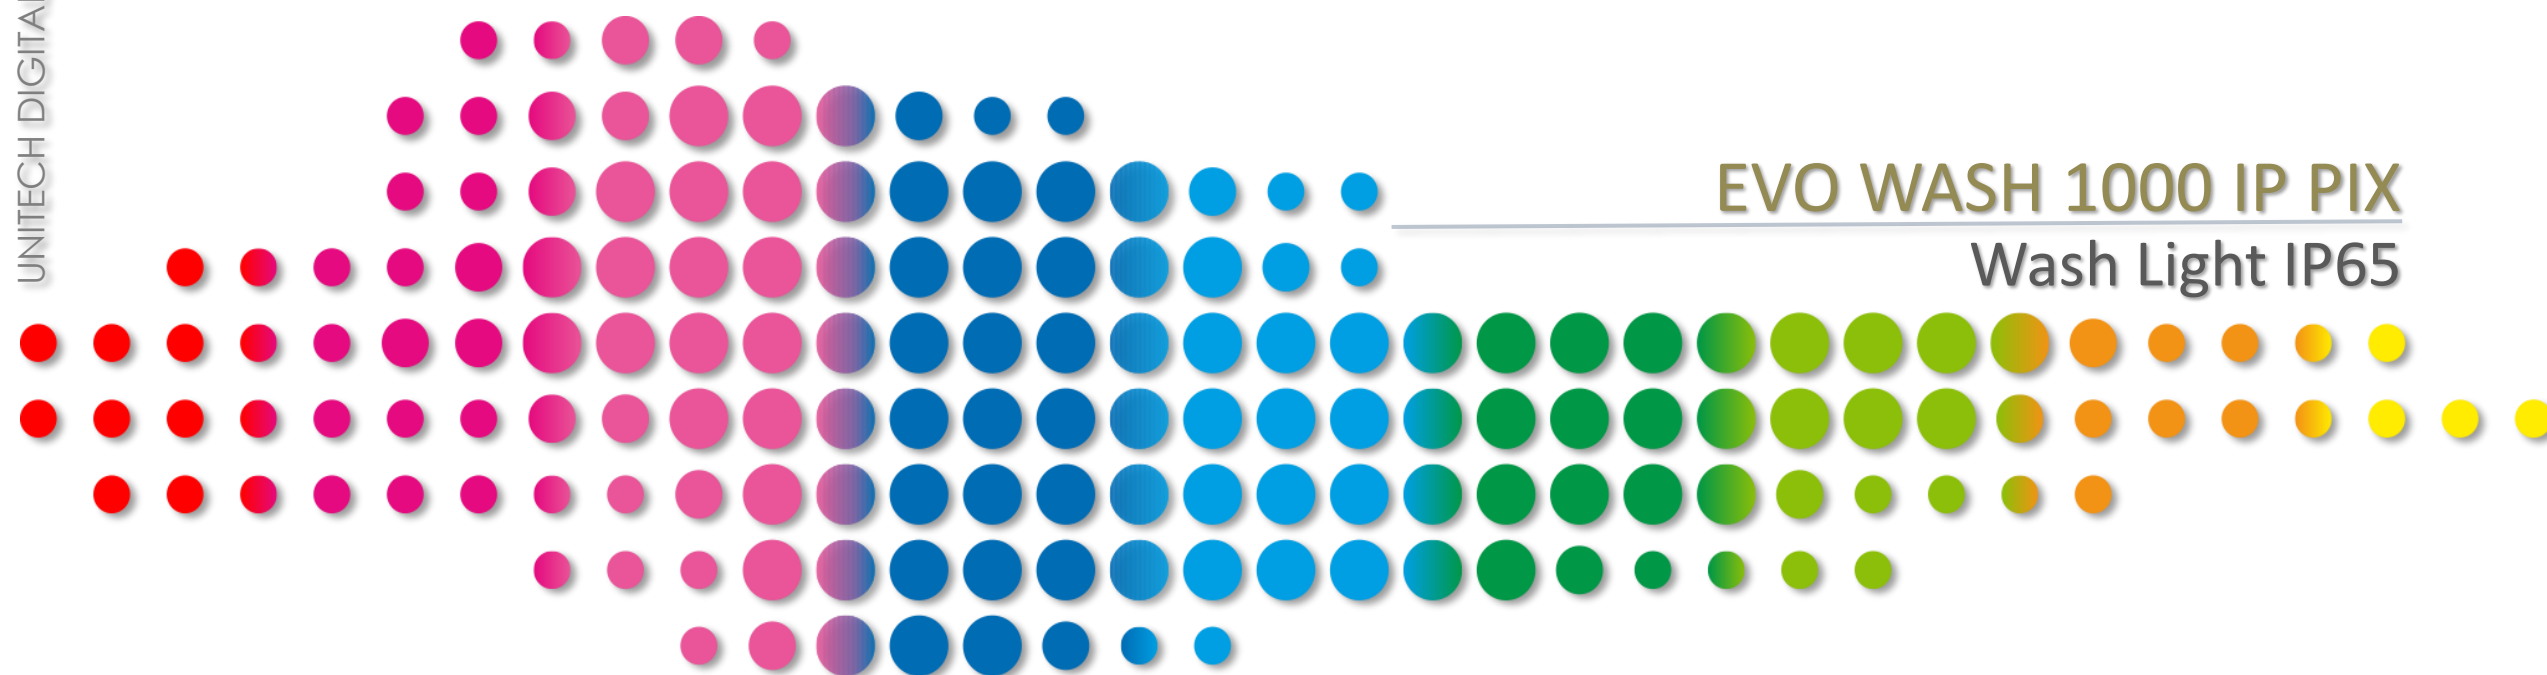

LIGHT SOURCE

40PCS 25W RGBW
Life Expectancy: 50,000 hours
Dimmer: 0-100% linear dimming

CONTROL


International standard DMX 512signal,
3 Pin (5 Pin) DMX512 interface RDM
Wireless : 2.4 GHz W-DMX™ (optional)
3 channel modes
Master-slave
Stand-alone mode
Self-test mode

EFFECT


Beam angle: 25°/45°/60°
Strobe : Electric strobe,
0.3-20pcs/sec Max 20 Hz
Adjustable horizontal and vertical speed
Display fixture using time
Display software version number
Modular structure for easy maintenance
Speed-regulating radiator

ELECTRICAL AND CONNECTORS

AC 100V/120V/200V/220V /230V/240V 50/60Hz
Level: IP65
Power consumption: 600W@220V

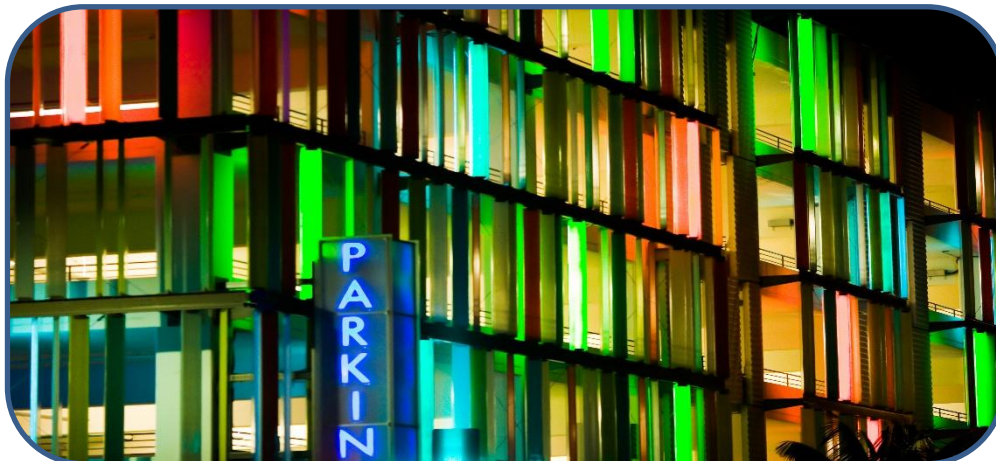

EVO WASH 1000 IP PIX

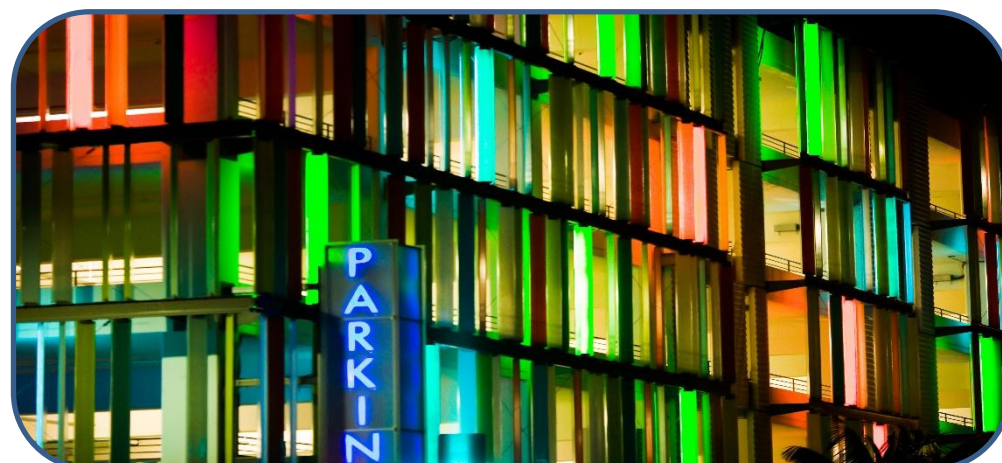

EVO WASH 1000 IP PIX



ORDERS CODE:



NAME: EVO WASH 1000 IP PIX
Net Weight: 14.8 Kg
Size: 530X172X357 mm

PART#: UNIEVOWASH1000IP



NAME: GANCIO ALISCAFF
Net Weight: 0.548 Kg
MAX.load: 200Kg

PART#: UNIALISCMONO200KG

NAME: FLY CASE EVO WASH 1000 IP PIX
Q'TY: PCS
N.W.: Kg
MEAS: mm
PART#: UNIFLYCSEVOWASH1000

