




EVO 1960 WB IP PIX RGBW
Moving Head IP65 Light

EVO 1960 WB IP PIX RGBW

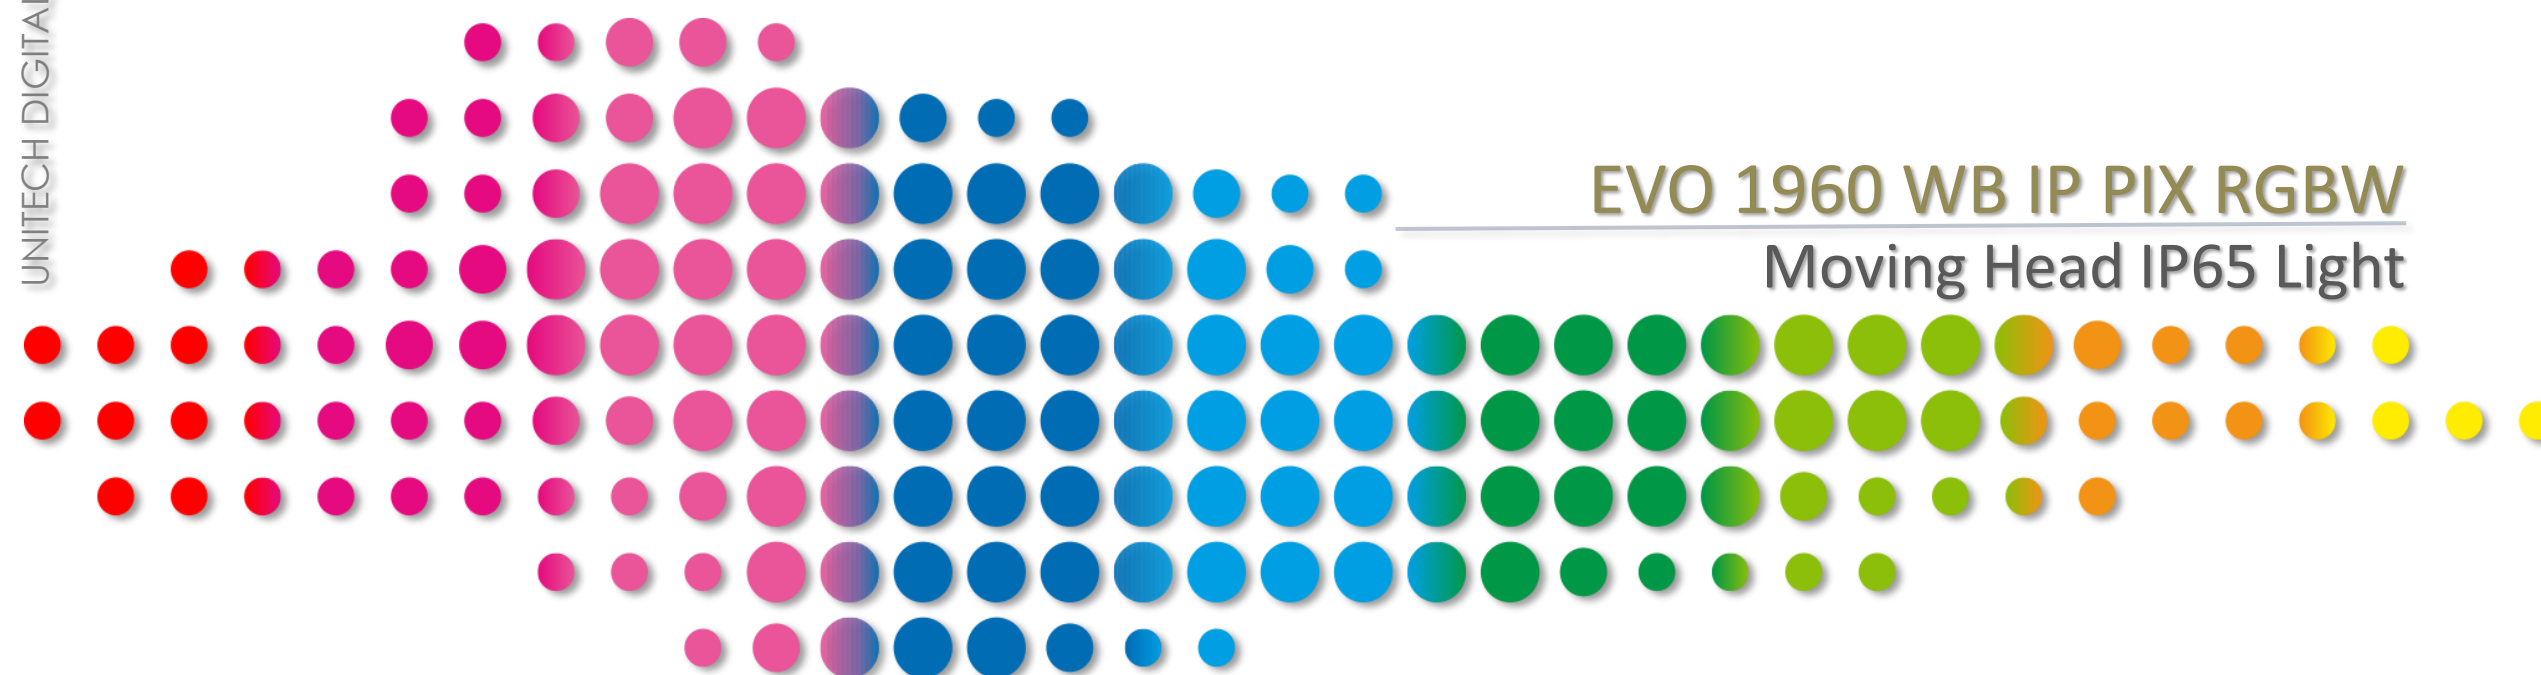

LIGHT SOURCE

Light Source:
19pcs* 60W RGBW LEDs OSRAM
72pcs* 0.5W RGB LEDs
Life Expectancy: 50,000 hours

CONTROL


4 touch button control panel
Display: LCD display
Protocols: DMX512, RDM, Art-Net, Sacn
26/98/238/309 DMX Channel Modes
DMX Adjustable Refresh Rate (800 - 24000 Hz)
Full Color 180° Reversible LCD Menu Display
RDM Support
IP65 5pin XLR DMX In/Out
IP65 RJ45 Ethernet In/Out (Art-Net, sACN)
IP65 Locking Power Cable In
With Wired Digital Communication Network
Control Channels: 26/98/238/309 DMX Channel Modes

PAN&TILT


Pan Movement: 540°
Tilt Movement: 210°
Automatic Pan/Tilt position correction
Resolution: 16 bit

ELECTRICAL AND CONNECTORS

Input Voltage Range: AC100-240V, 50/60Hz
Max Power Consumption: 1500W
BTU/hr (+/- 10%) 2387
Power In/Out: Waterproof power connector in/out
Data In/Out: 3-pin or 5-pin waterproof XLR, RJ4 connector
Level: IP65

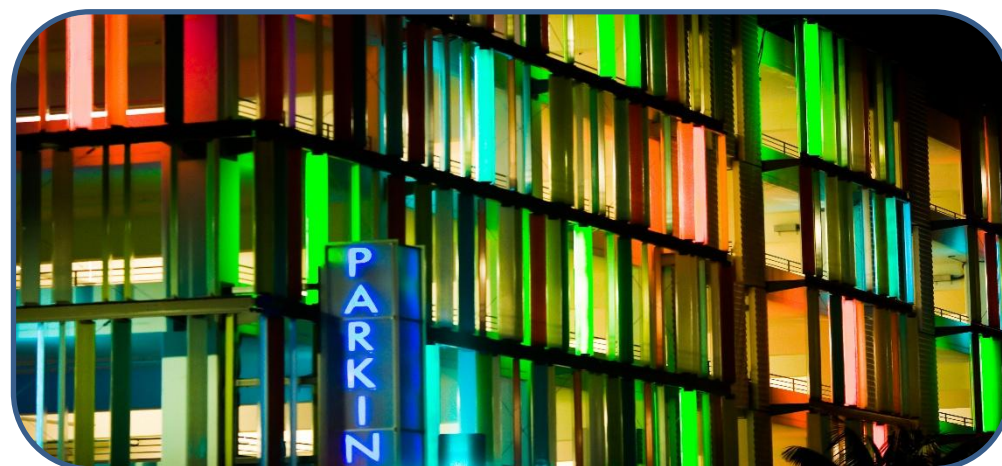

EVO 1960 WB IP PIX RGBW


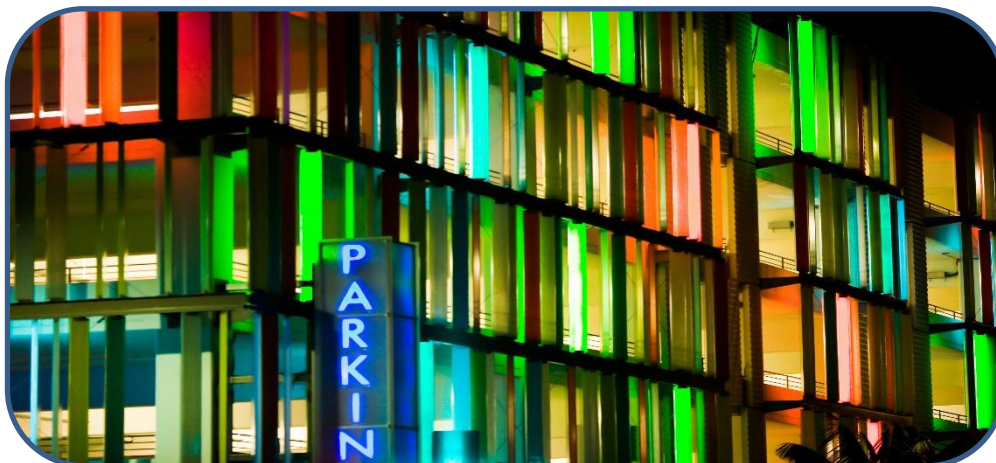


EVO 1960 WB IP PIX RGBW



EFFECTS

- Motorized Zoom
- Linear Color Temperature Presets (2000 -8000K)
- RGBL Color Mixing and Pixel Control
- RGB Spark LED Lens Effect
- Color Presets and Macros
- Electronic Strobe and Variable Dimming Curves
- 16 - Bit Dimming

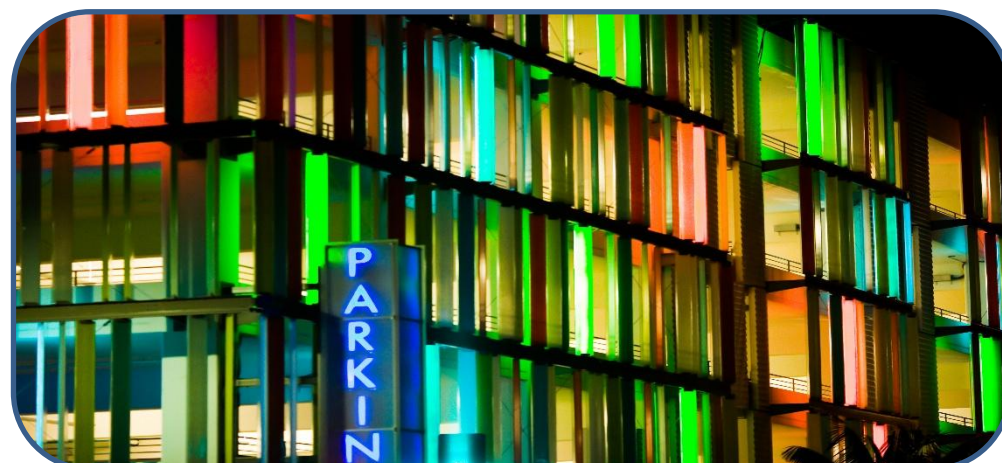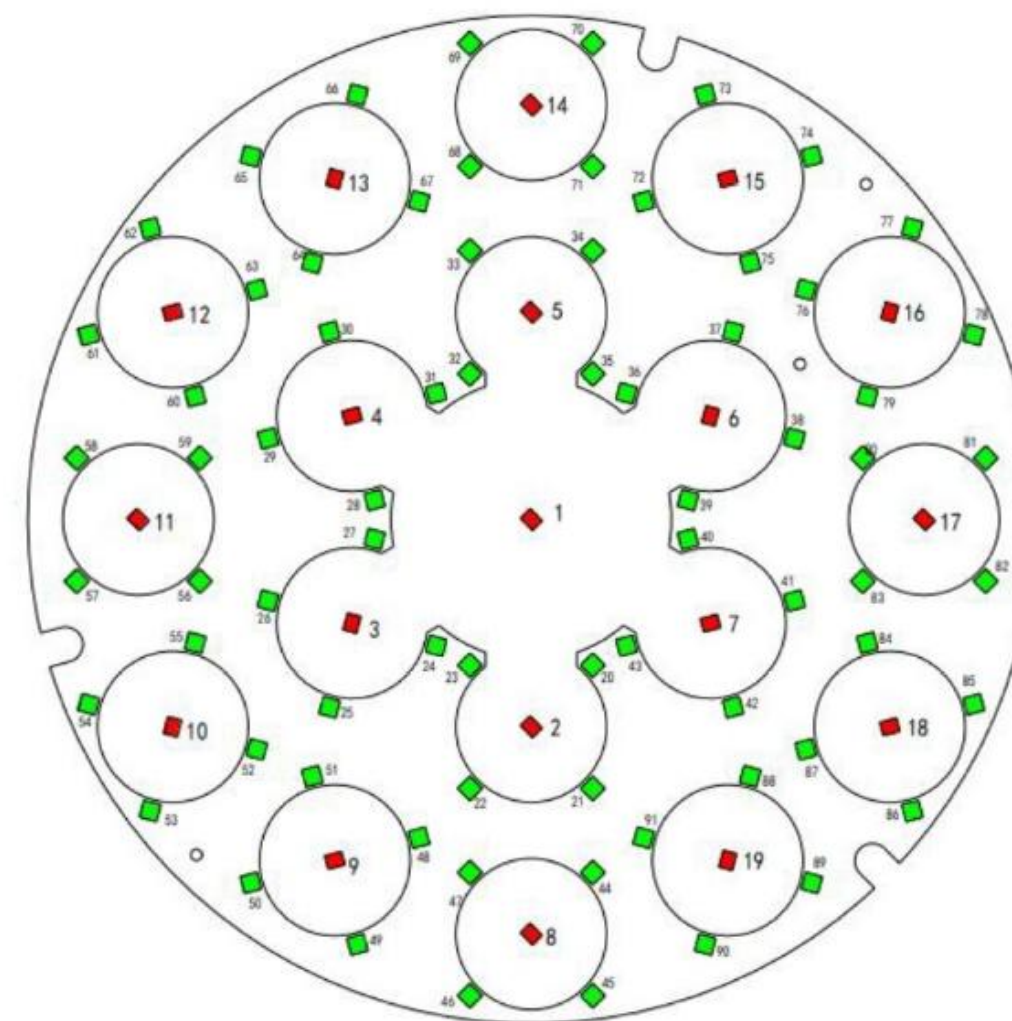

EVO 1960 WB IP PIX RGBW





UNITECH
DIGITALMEDIA

PHYSICAL INFORMATION

Fixture Dimensions: 430X280X514mm

Weight: 23kg




IP Rated: IP65

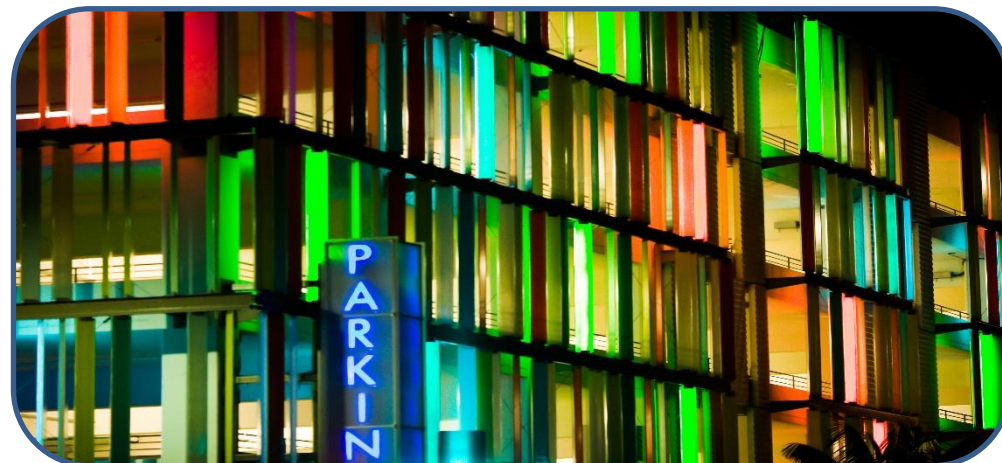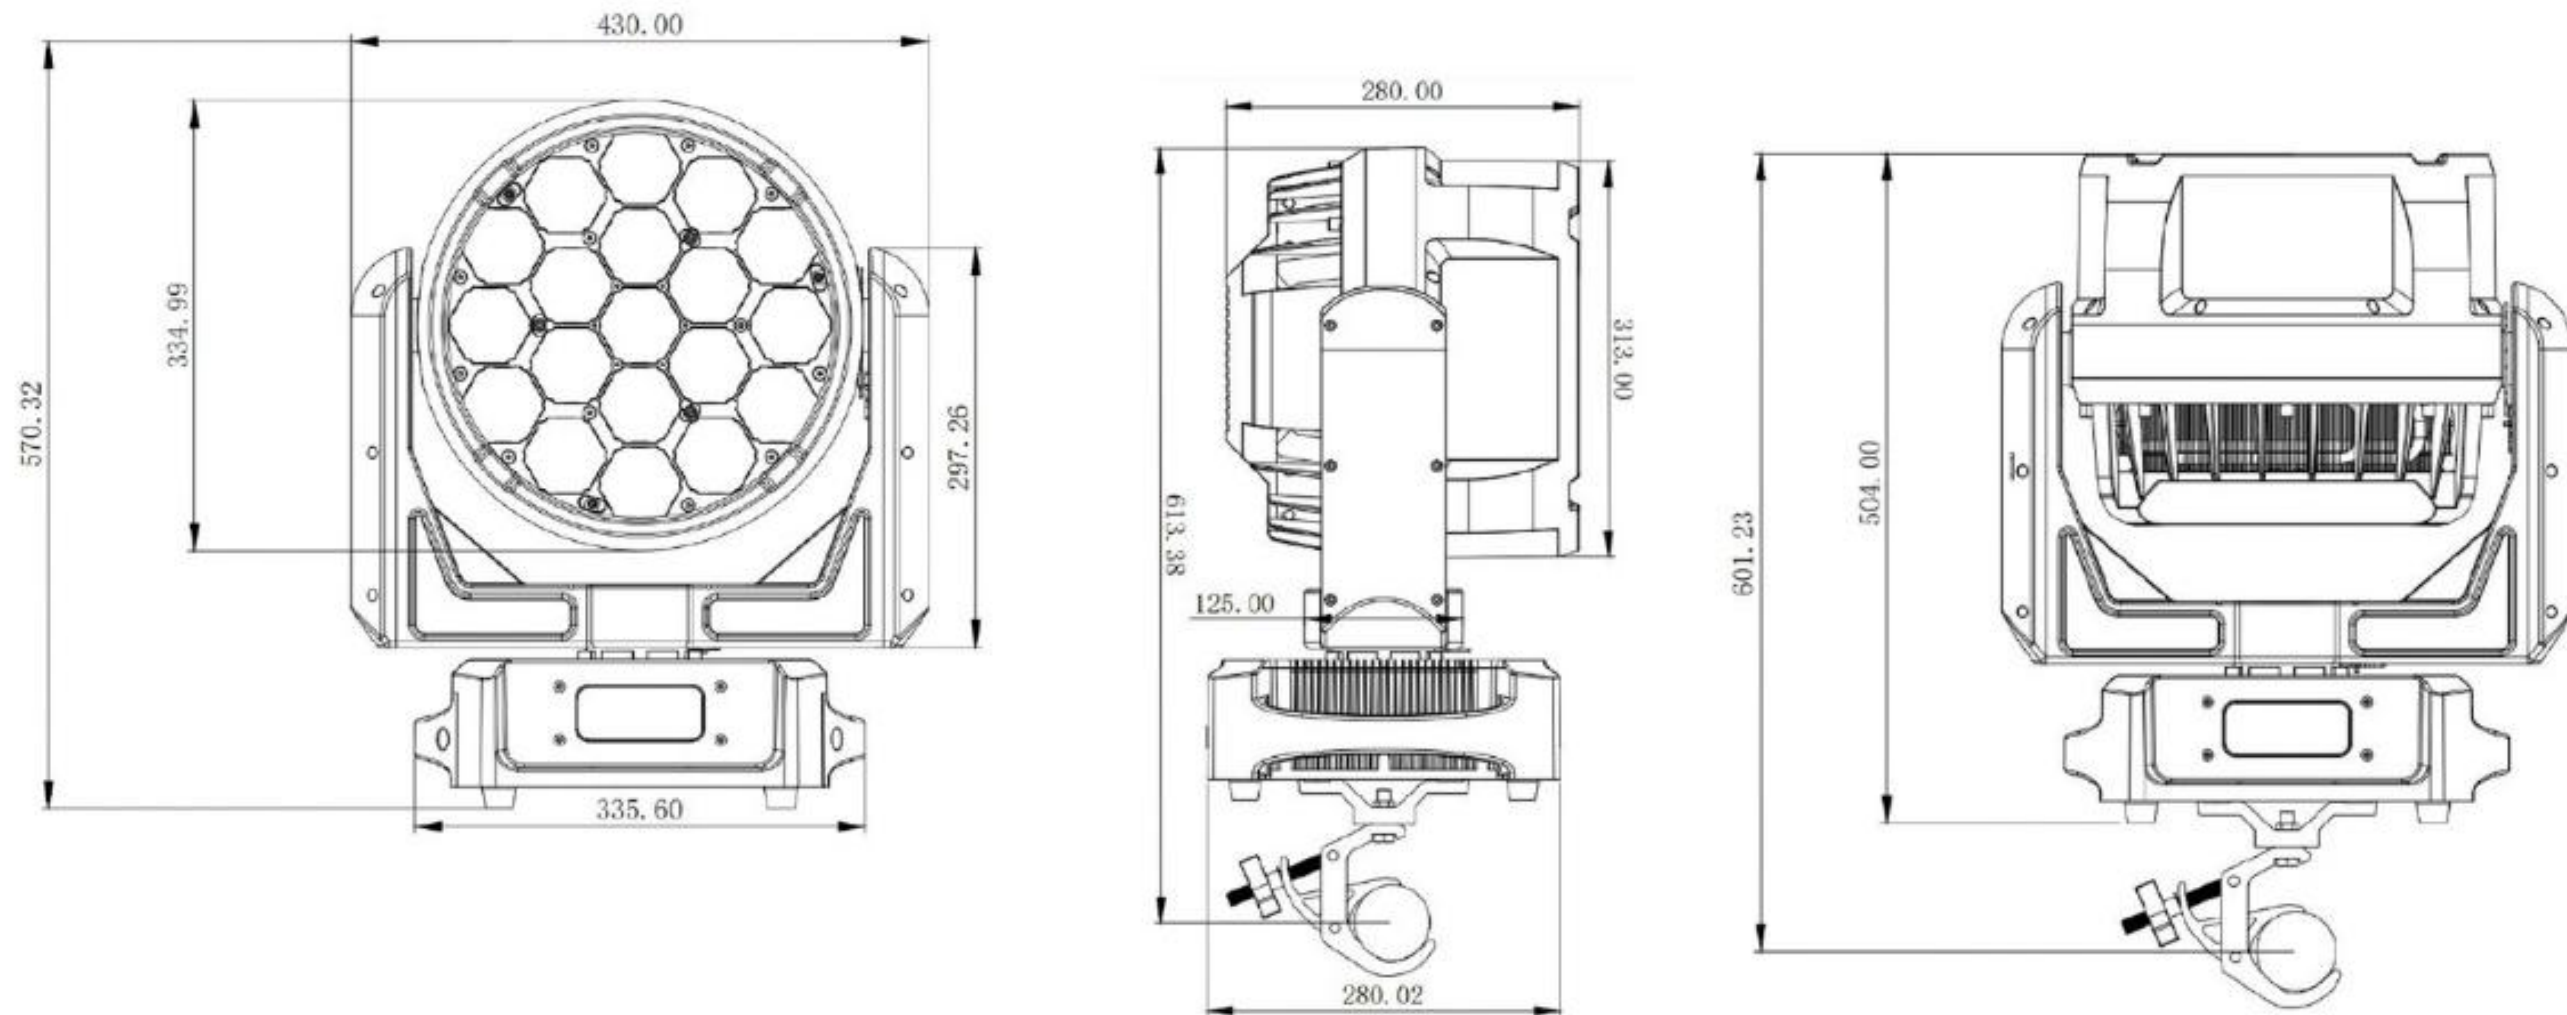

EVO 1960 WB IP PIX RGBW



unitech
digitalmedia

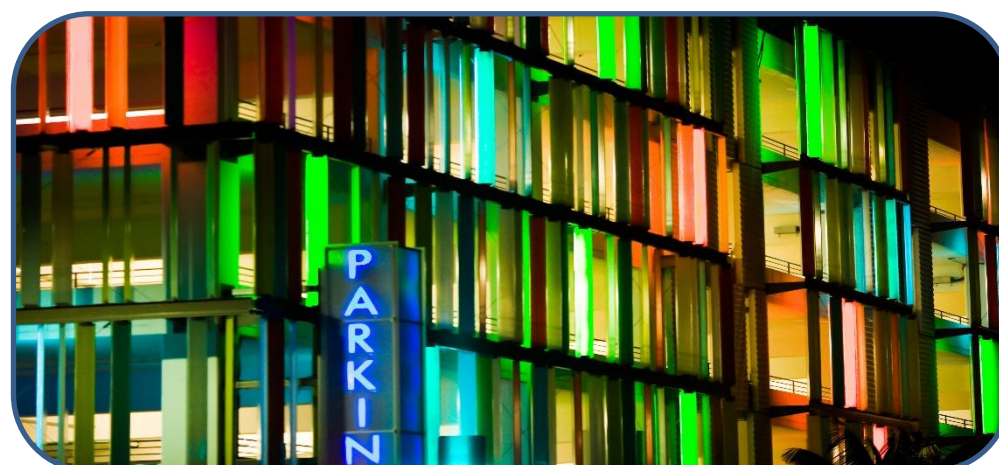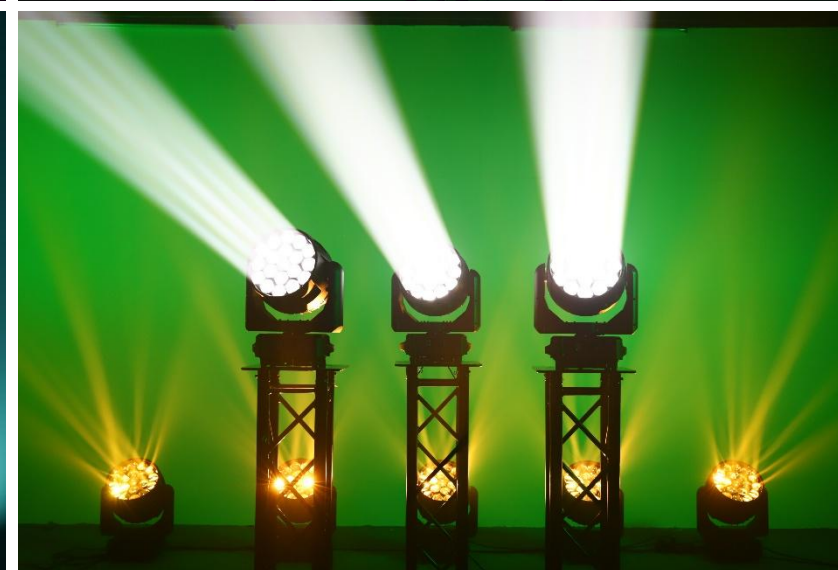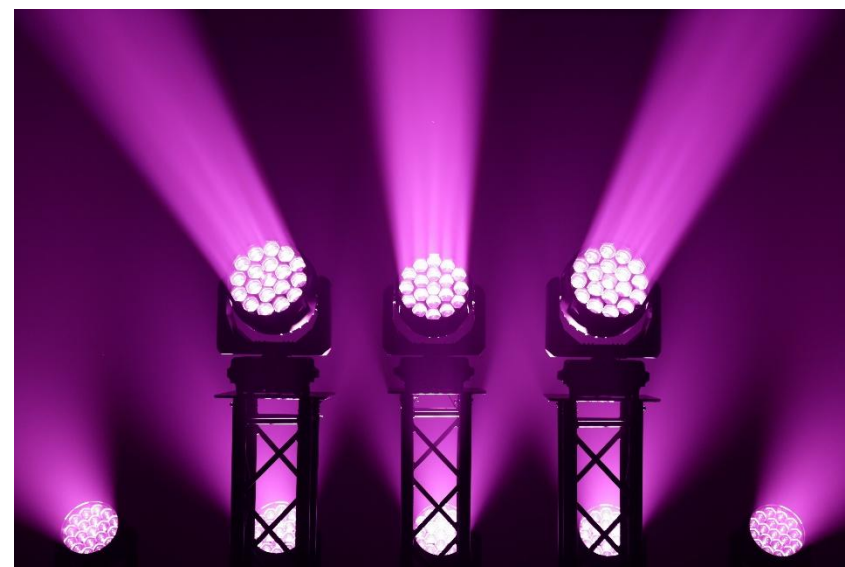

EVO 1960 WB IP PIX RGBW




OPTICAL SYSTEM


Zoom Range:4,5°-60°


Standard Mode:Ra>80

HCRI Mode:Ra≥90

Diameter of Frontal

1960 Small Angle (4.5°50%-8.5°10%) C800					
Full (lux)	131000	82100	39500	/	/
Red (lux)	15500	9350	4750	/	/
Green (lux)	48400	30700	14600	/	/
Blue (lux)	8930	6410	2720	/	/
Lime (lux)	55900	35800	17400	/	/
					
Illumination Distance	3m	5m	8m	/	/
50% Beam Width	0.25m	0.36m	0.62m	/	/
10% Spot Size	0.46m	0.62m	1.2m	/	/

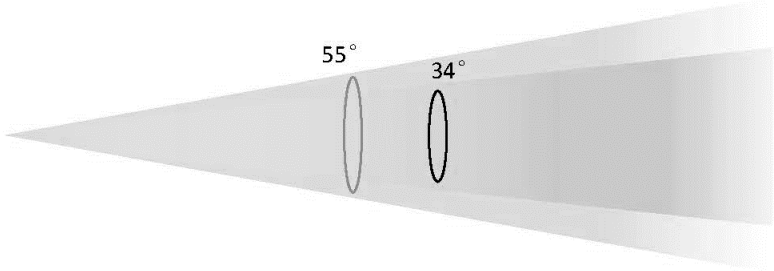1960 Large Angle (55°50%-34°10%) C800					
Full (lux)	5020	1800	723	/	/
Red (lux)	607	230	92	/	/
Green (lux)	2010	740	296	/	/
Blue (lux)	366	132	53	/	/
Lime (lux)	2230	820	328	/	/
					
Illumination Distance	3m	5m	8m	/	/
50% Beam Width	1.86m	3.06m	4.9m	/	/
10% Spot Size	3.10m	5.23m	8.22m	/	/

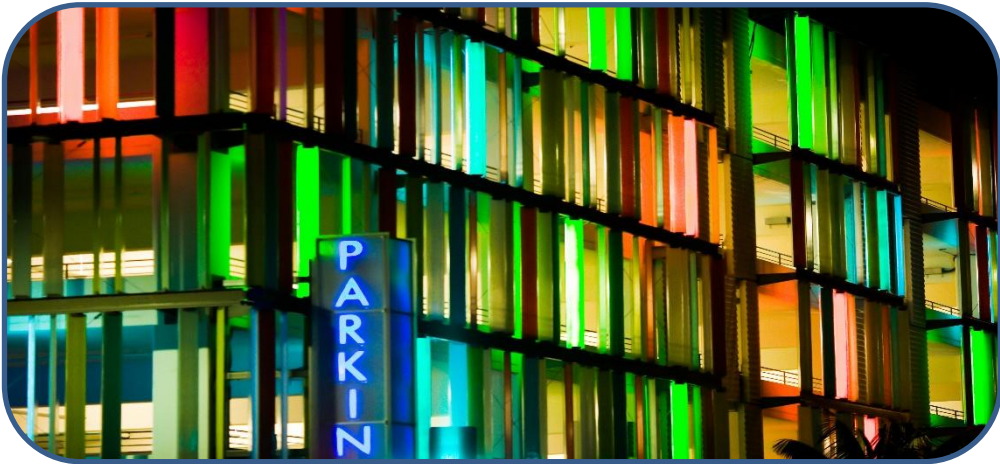

EVO 1960 WB IP PIX RGBW



ORDERS CODE:



NAME: EVO 1960 WB IP PIX RGBW
Net Weight: 23 Kg
Size: 430X280X514 mm

PART#: UNIEVO1960WBPIXIP-RGBW



NAME: GANCIO ALISCAFF
Net Weight: 0.548 Kg
MAX.load: 200Kg

PART#: UNIALISCMONO200KG



NAME: FLY CASE EVO 1960 WB IP PIX RGBW
Q'TY: 02 PCS
N.W.: 50 Kg
MEAS: 700x530x780 mm
PART#: UNIFLYCSEVO1960

