




EVO BLINDER 1200 IP

Blinder Moving Tilt IP65 Light

EVO BLINDER 1200 IP

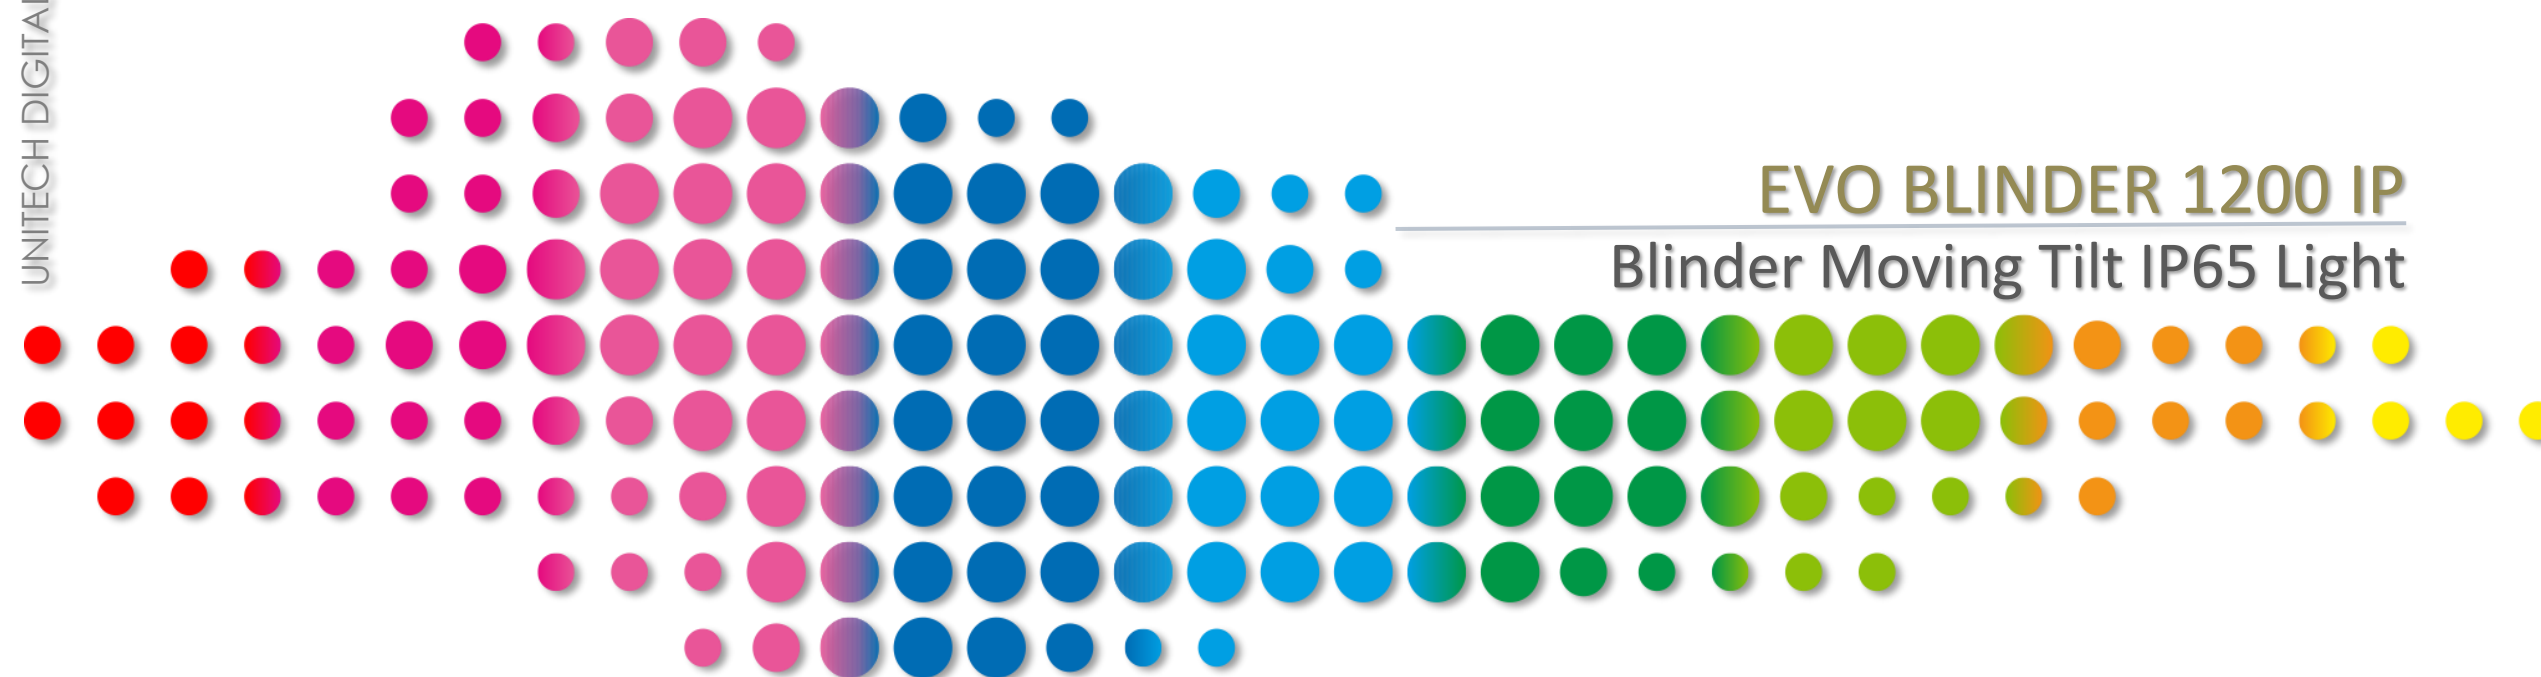

LIGHT SOURCE

1320 pcs 0.8W 5050 SMD RGBW (RGB)
LED Life Expectancy: 50,000 hours

CONTROL


DMX Channel
4CH,6CH,10CH,18CH RGBW
3CH,6CH,9CH,18CH RGB
Control Model :
DMX, Stand-alone, Master/Slav

PAN&TILT


Beam angle: 120°
Dynamic macro effect
Strobe:1-30Hz,variable flash rate,intensity
and duration

ELECTRICAL AND CONNECTORS

Input: 110V-240V 50/60HZ
MAX continuous Power consumption :<750W
MAX strobe Power consumption :1200W
Level: IP65

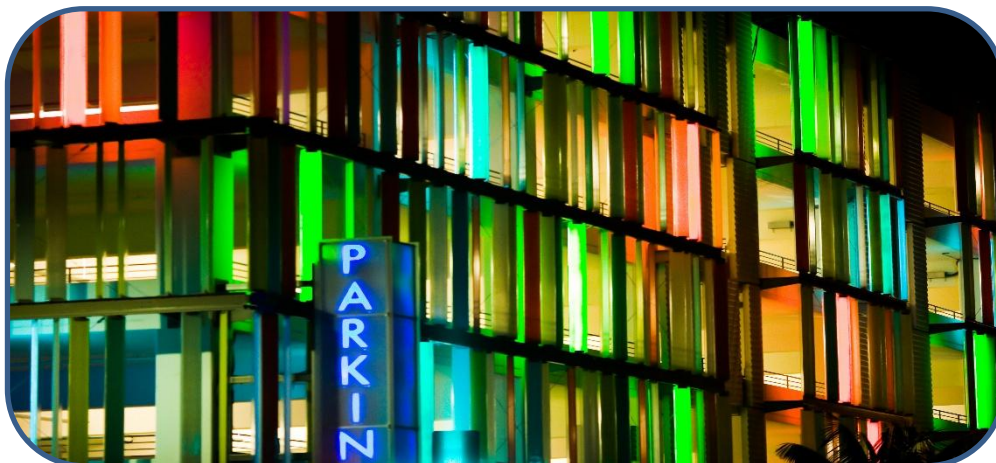

EVO BLINDER 1200 IP

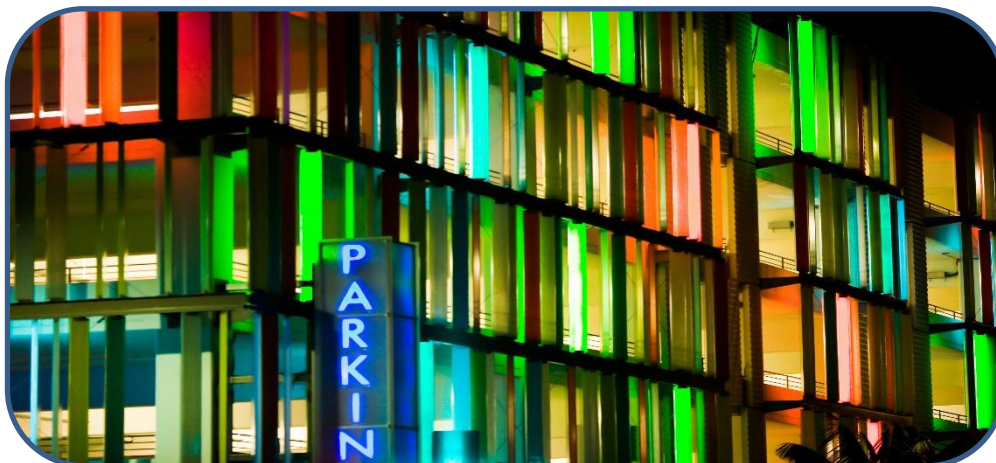





EVO BLINDER 1200 IP

PHYSICAL INFORMATION

Fixture Dimensions: 430X205X285mm

Weight: 12.5 Kg

IP Rated: IP65

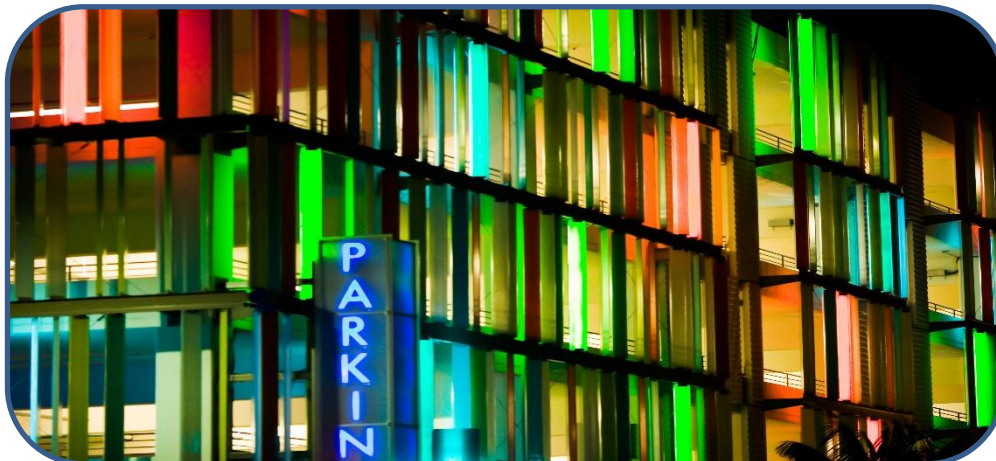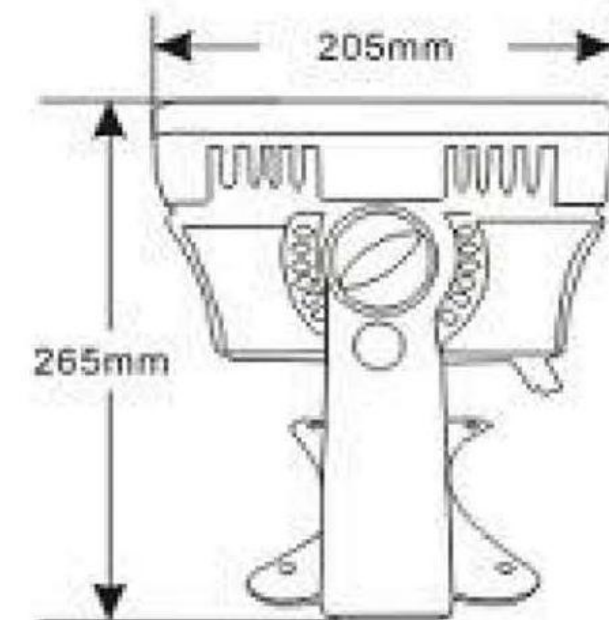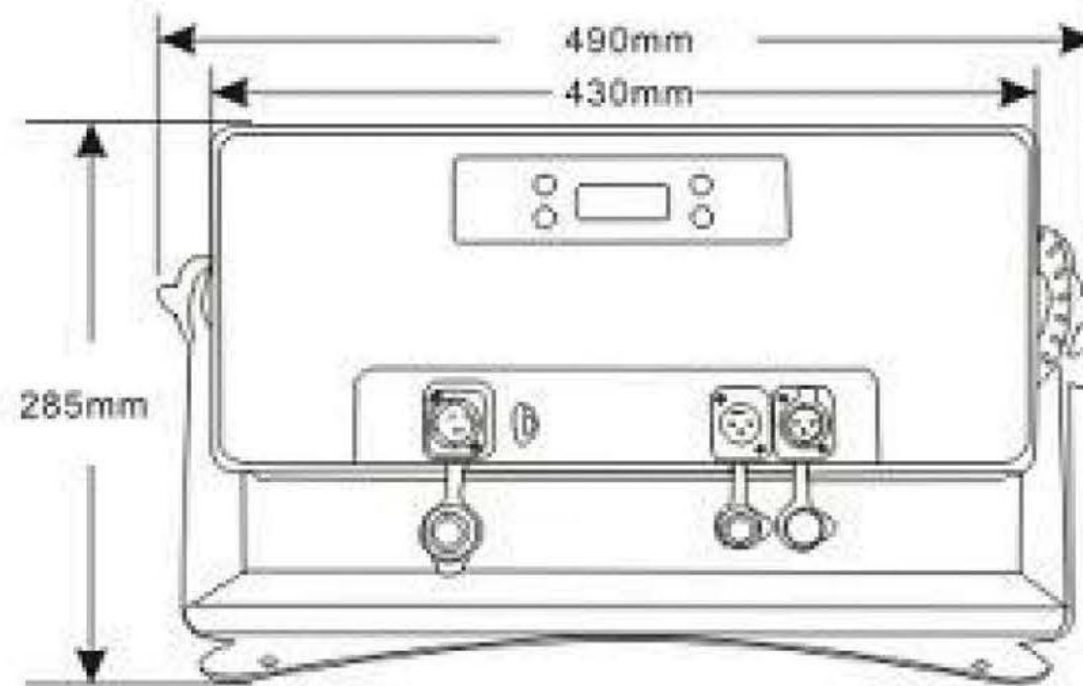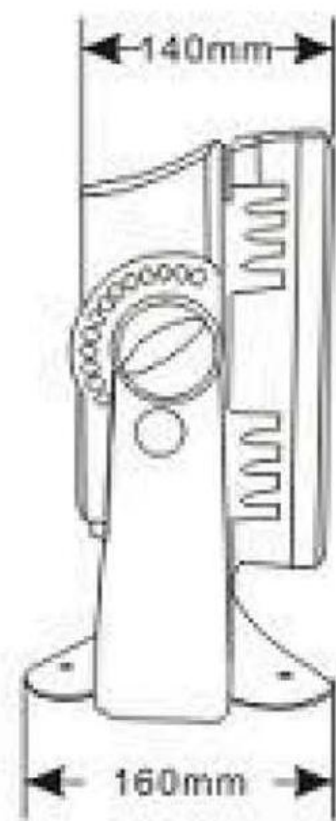

EVO BLINDER 1200 IP



ORDERS CODE:



NAME: EVO BLINDER 1200 IP
Net Weight: 12.5 Kg
Size: 430X205X285mm

PART#: UNIEVOBLINDER1200IP



NAME: GANCIO ALISCAFF
Net Weight: 0.548 Kg
MAX.load: 200Kg

PART#: UNIALISCMONO200KG

NAME: FLY CASE EVO BLINDER 1200 IP
Q'TY: PCS
N.W.: Kg
MEAS: mm
PART#: UNIFLYCSEVOBLINDER1200

