



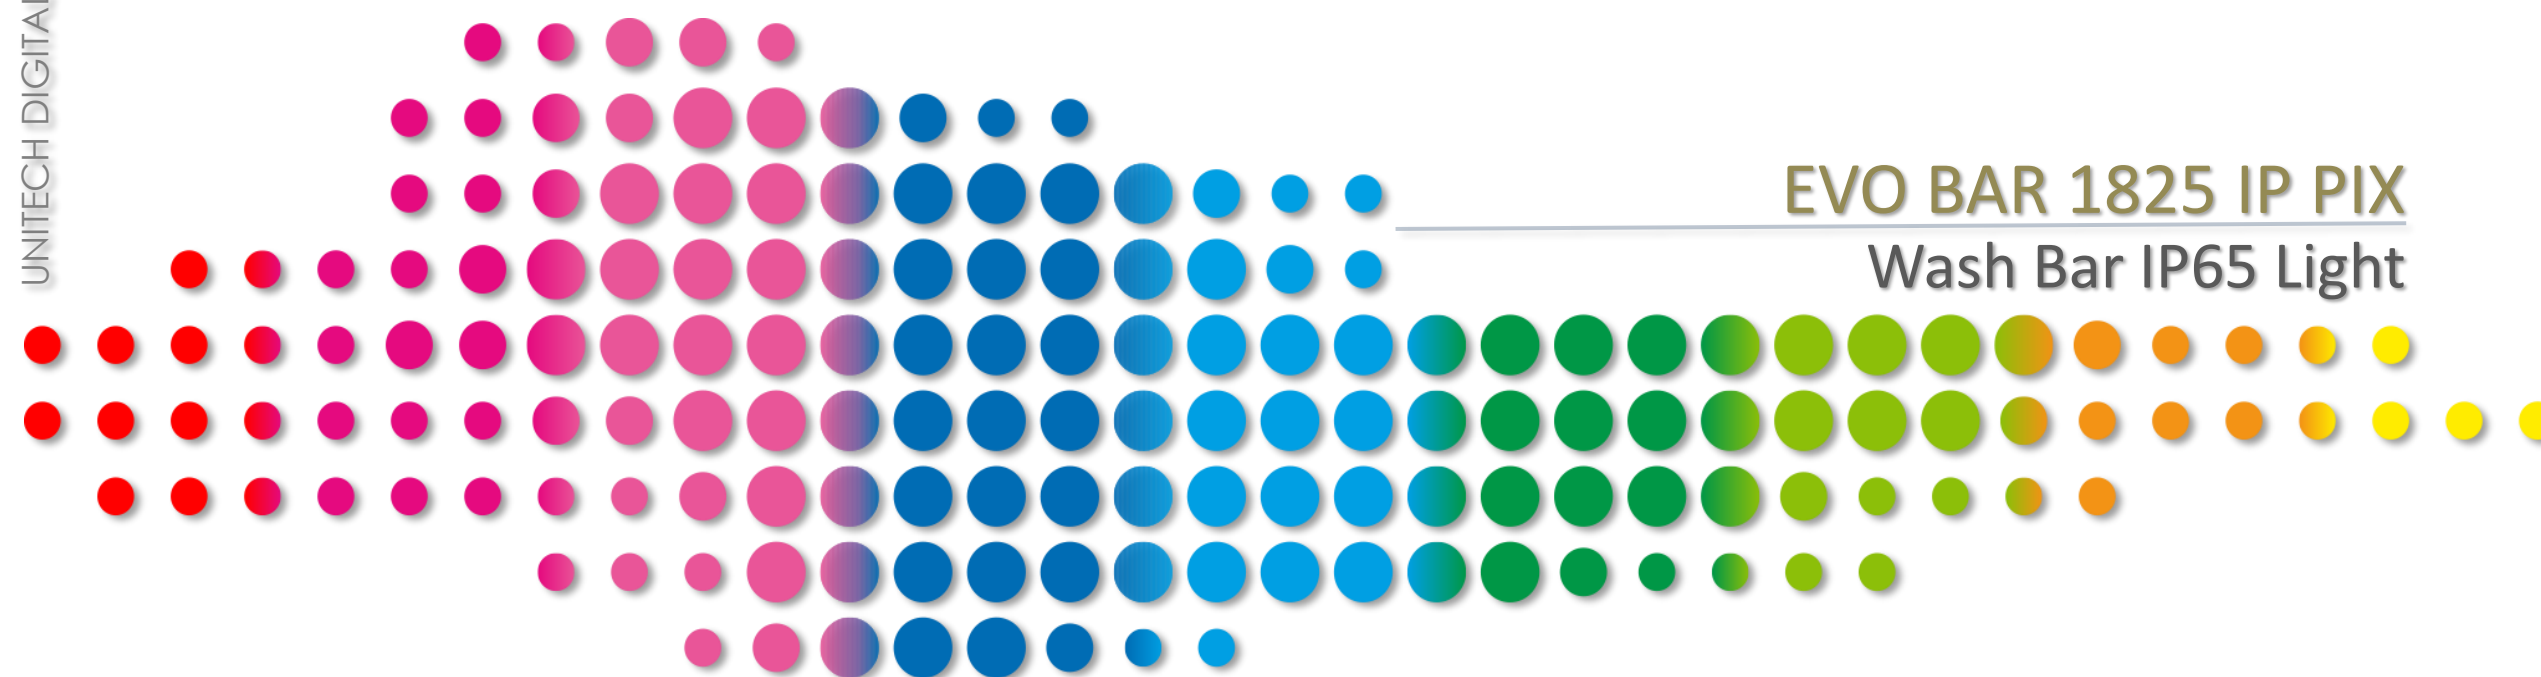

EVO BAR 1825 IP PIX

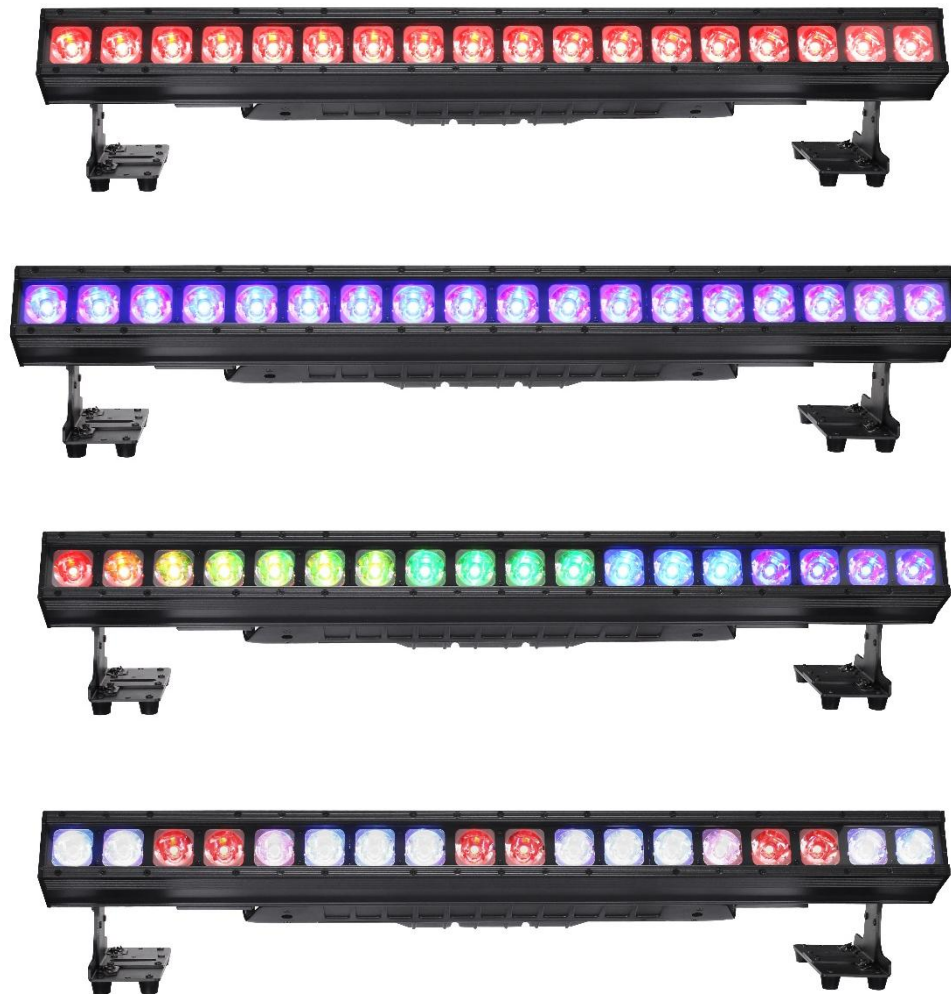

LIGHT SOURCE

18pcs*25W RGBL 4IN1 LEDs.
Color Temperature: 2700-8000K
Installed Optics: 6°/45°(can be changed)

EFFECTS


Dimmer: Electronic Shutter/Strobe: Electronic
Strobe Rate: 0-25Hz
Standalone: Yes
Color Mixing: Yes
Color Temperature Presets: Yes
Dim Modes: 4 kinds
White Balance: Yes

CONTROL


Control Protocol: DMX/ArtNet/sACN/RDM
DMX Channels: 10/15CH
Build-in Effects: Yes
Software Update: Via RJ45 Cables

ELECTRICAL AND CONNECTORS

Power Supplier: 24V+12V at 10000W with FPS
Power Linking: 3 units @ 100V; 5 units @ 120V; 7 units @ 208V; 9 units @ 230V; 10 units @ 240V
Power Connection: Seetronic Powercon IP65
Power Input/Output: Seetronic Powercon IP65
Level: IP65

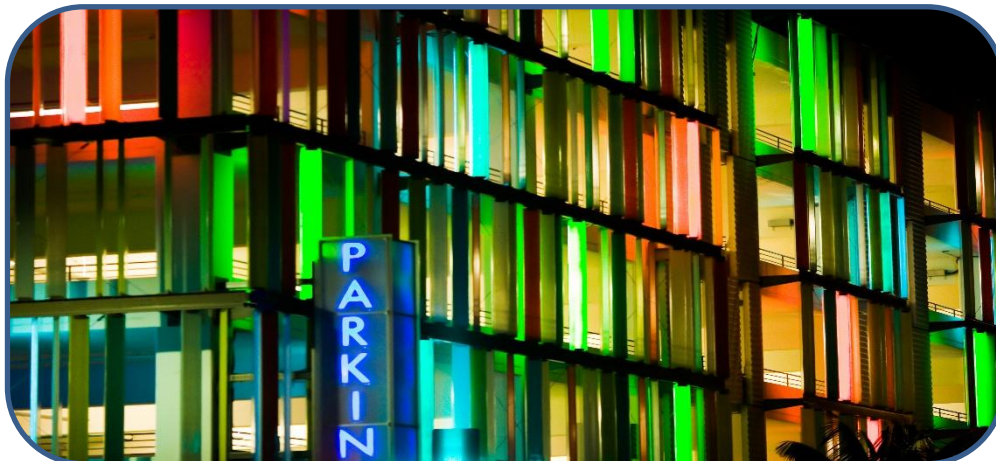

EVO BAR 1825 IP PIX

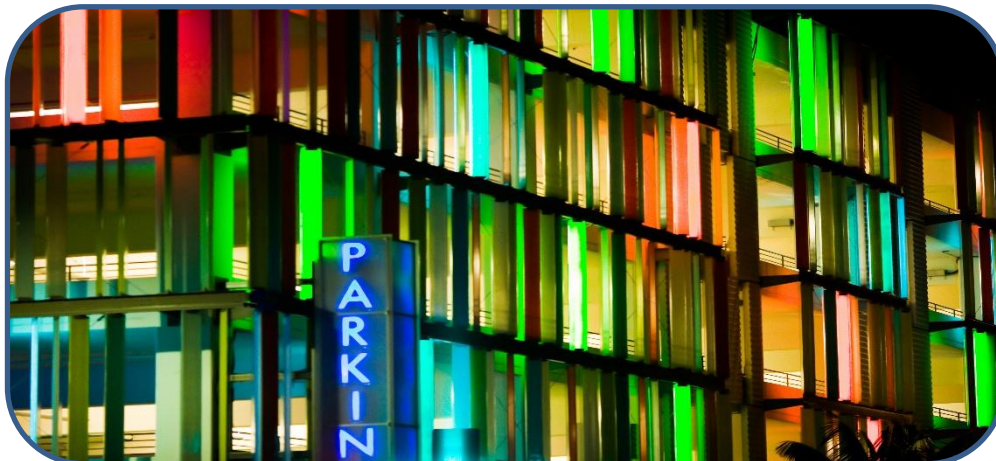

EVO BAR 1825 IP PIX

PHYSICAL INFORMATION



Fixture Dimensions: 1000X85X210 mm

Weight: 10.5 Kg

IP Rated: IP65



UNITECH
DIGITALMEDIA

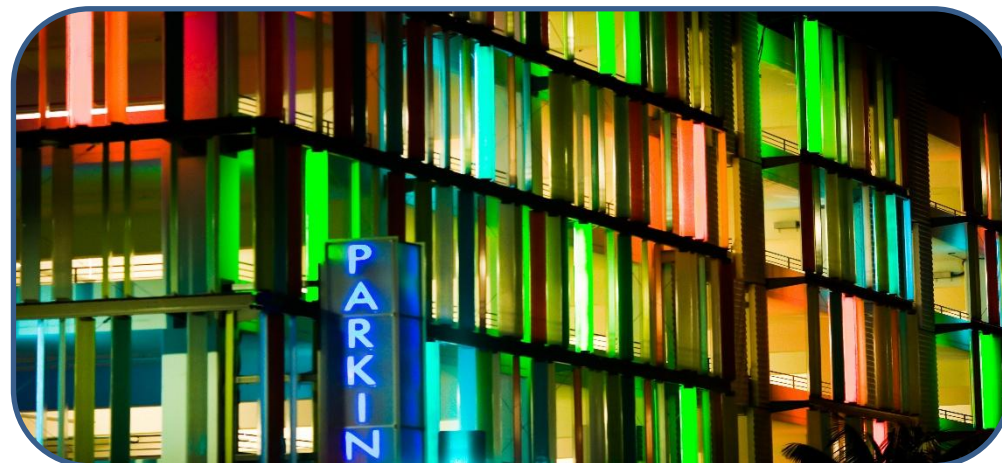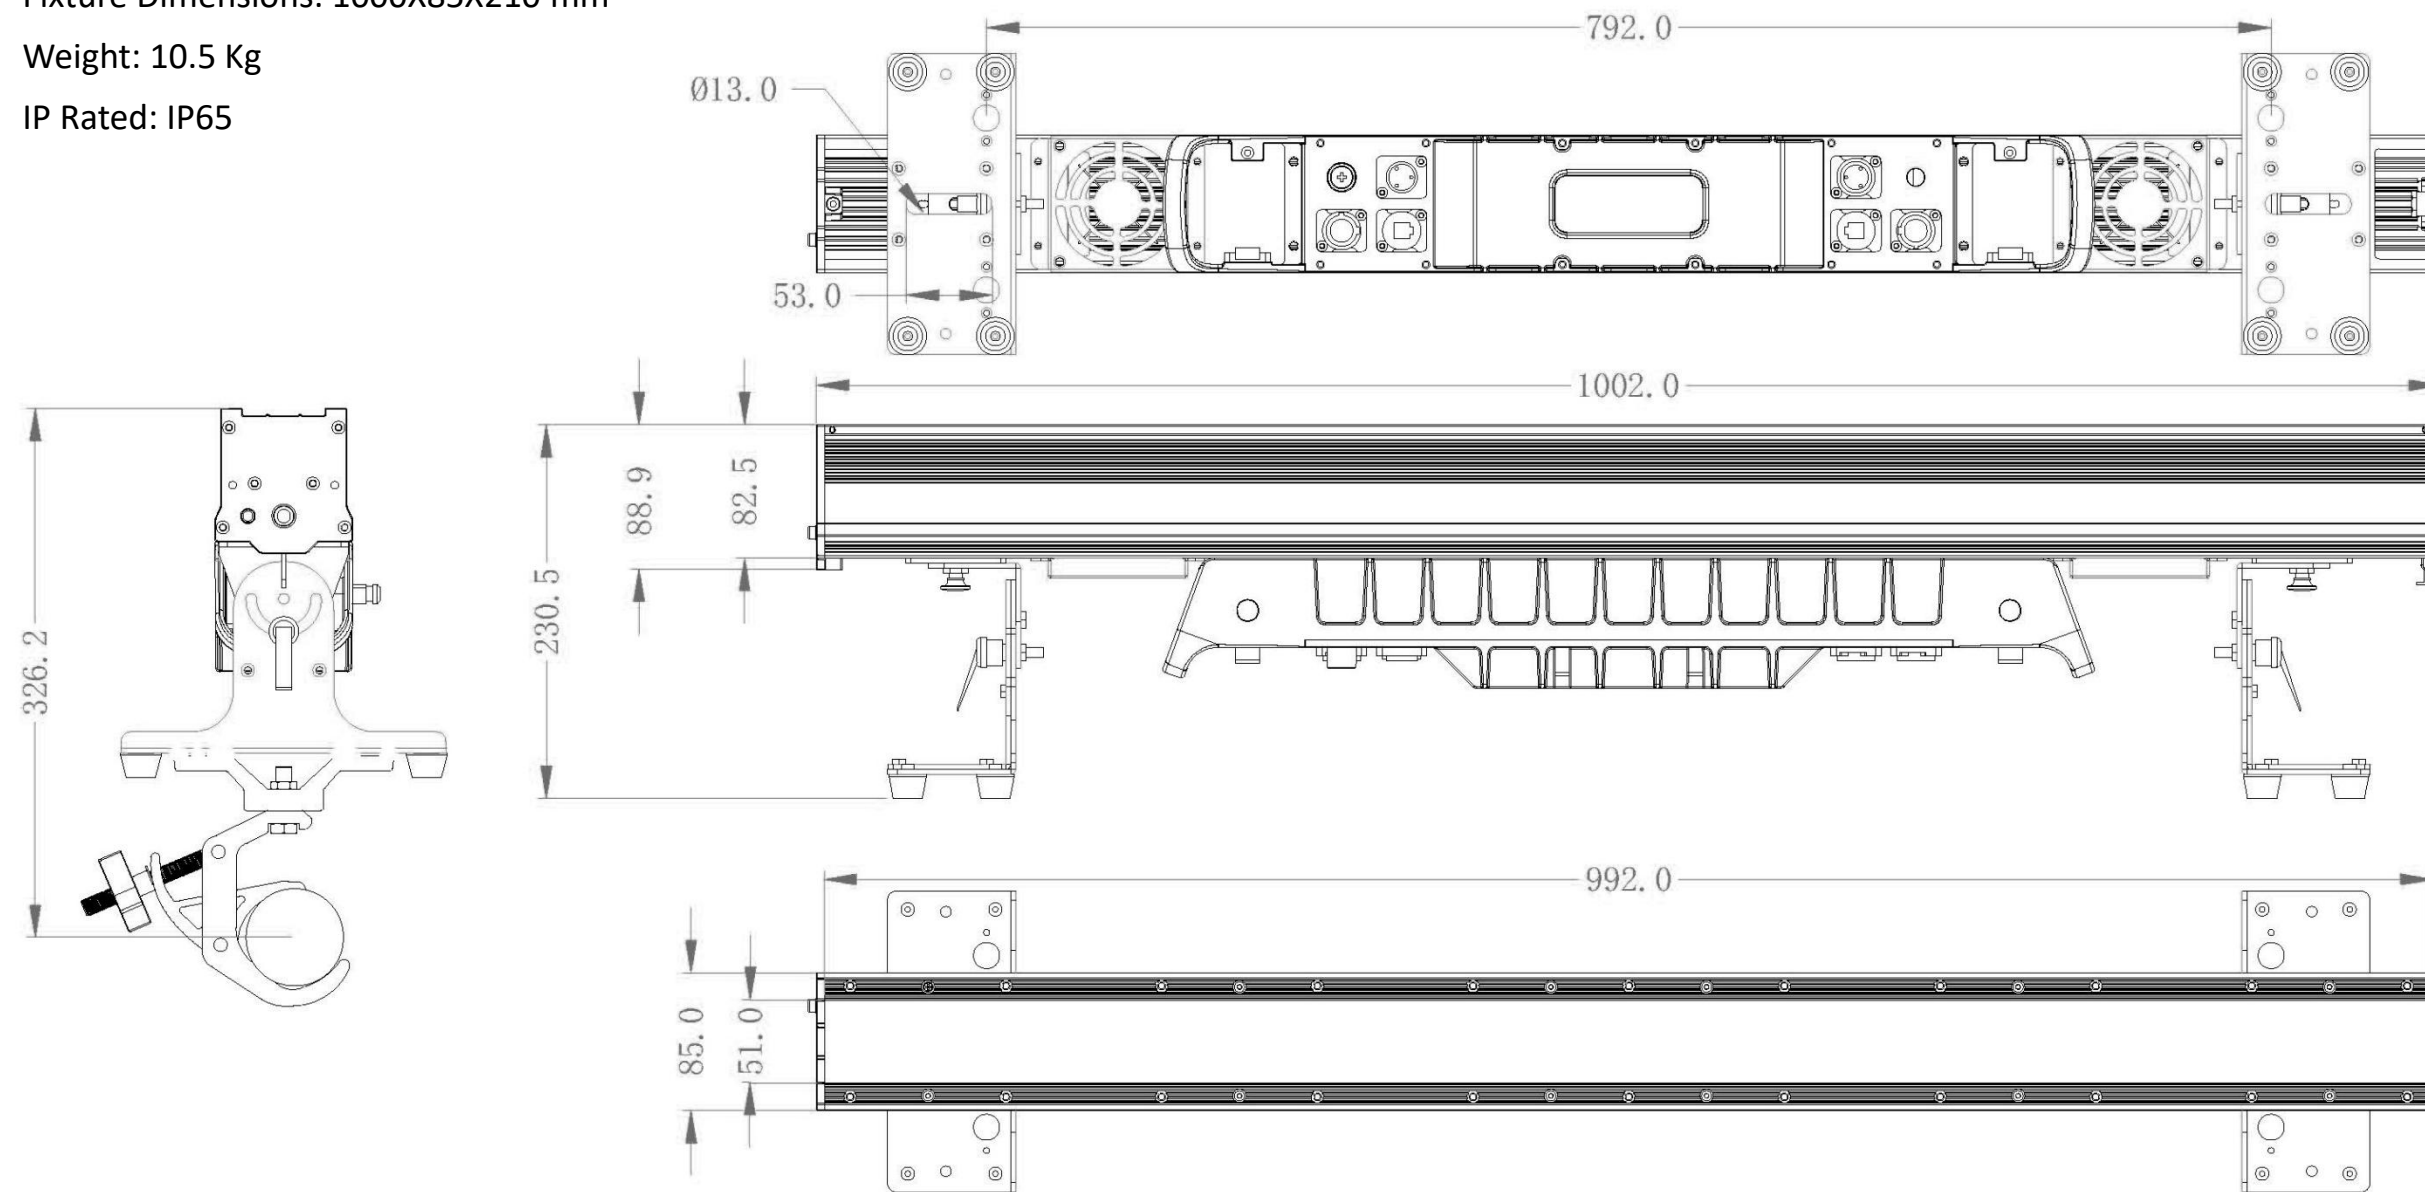

EVO BAR 1825 IP PIX



ORDERS CODE:



NAME: EVO BAR 1825 IP PIX
Net Weight: 10.5 Kg
Size: 1000X85X210 mm

PART#: UNIEVOBAR1825IP



NAME: GANCIO ALISCAFF
Net Weight: 0.548 Kg
MAX.load: 200Kg

PART#: UNIALISCMONO200KG



NAME: FLY CASE EVO BAR 1825 IP PIX
Q'TY: 04 PCS
N.W.: 37.7 Kg
MEAS: 106x580x500 mm
PART#: UNIFLYCSEVOBAR1825

