




EVO PROFILE BFSW IP

Moving Head IP65 Light

EVO PROFILE BFSW IP

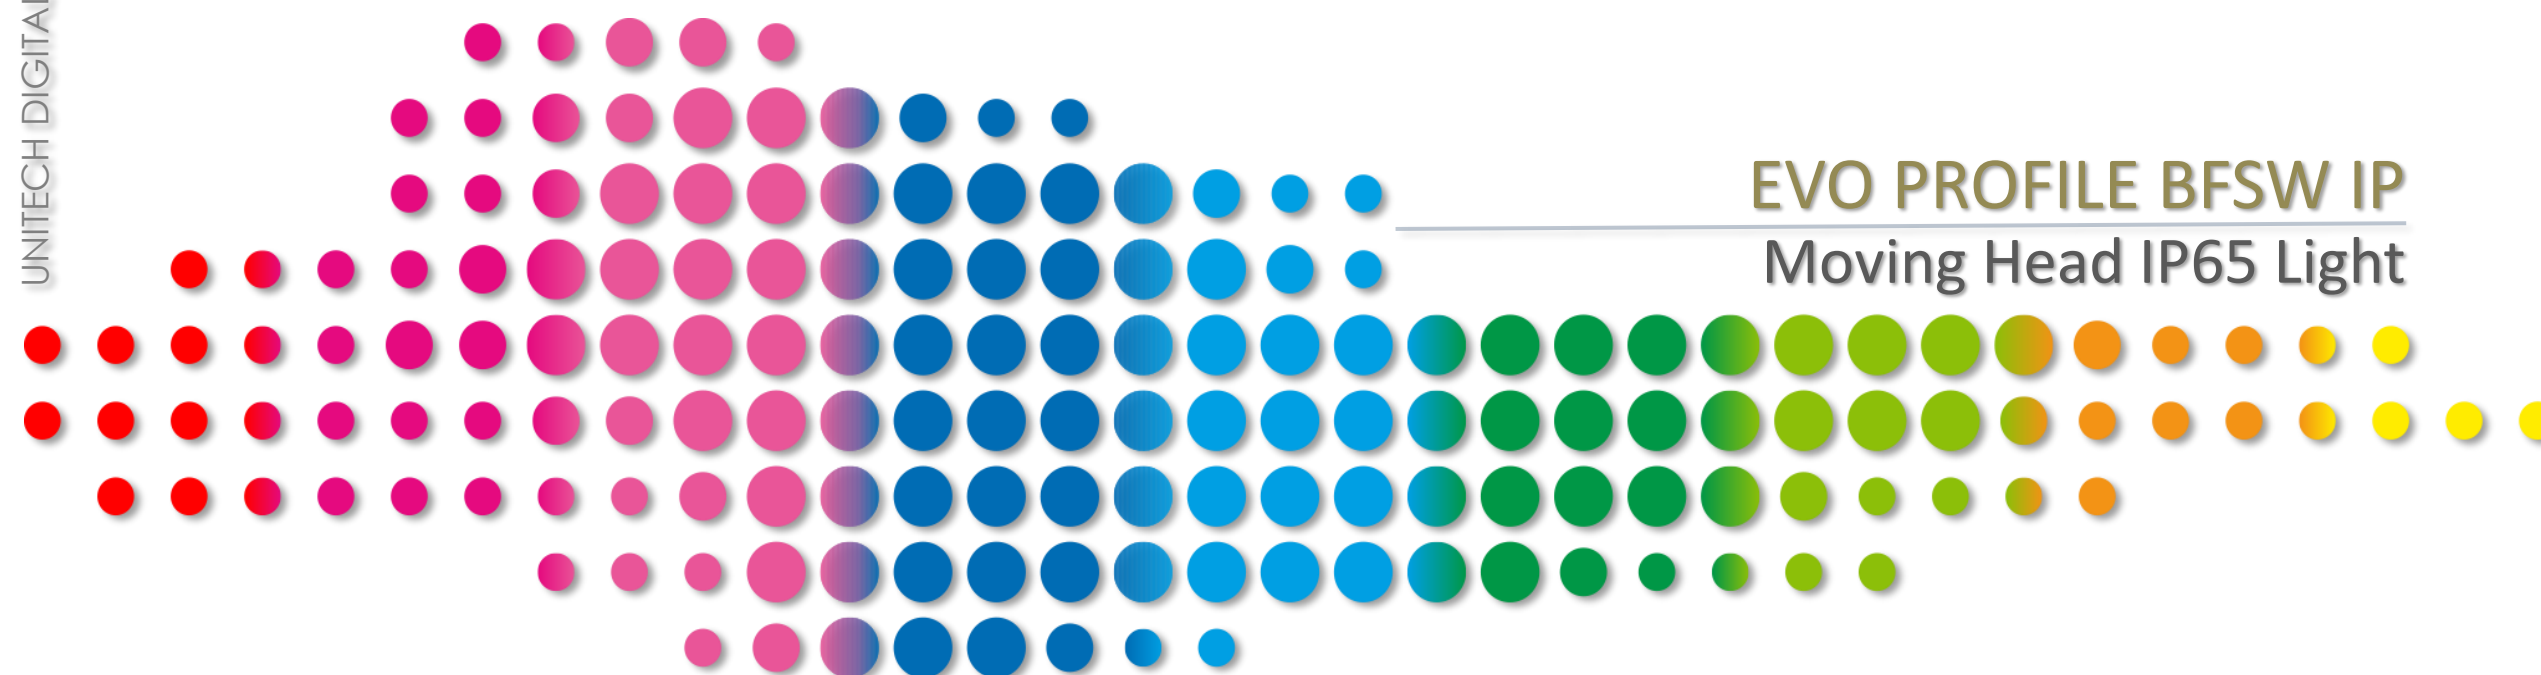

LIGHT SOURCE

Light Source:800W LED Engine
Total Lumen Output of Fixture:5,2500 lm
Color Temperature Output of Fixture: 7.000K
Life Expectancy: 20.000 hours

PAN&TILT


Pan Movement:540°
Tilt Movement:260°
Automatic Pan/Tilt position correction
Resolution:16 bit

CONTROL


4 touch button control panel
Display:LCD display
Protocols:DMX512,RDM,Art-Net,sACN
Control Channels:42CH/32CH/23CH

ELECTRICAL AND CONNECTORS

Input Voltage Range:100-240V,50/60Hz
Power Consumption:910W
Power In/Out:Waterproof power connector in/out
Data In/Out:3-pin or 5-pin waterproof XLR, RJ45 connector

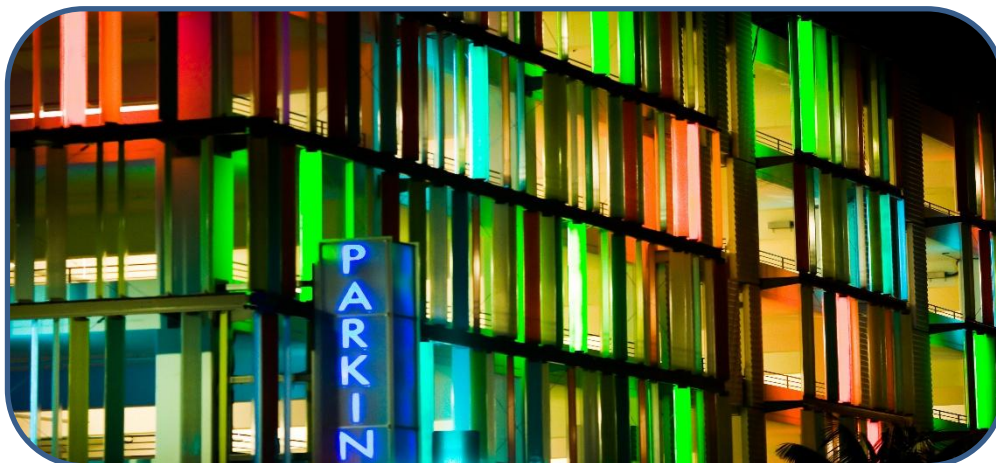

EVO PROFILE BFSW IP

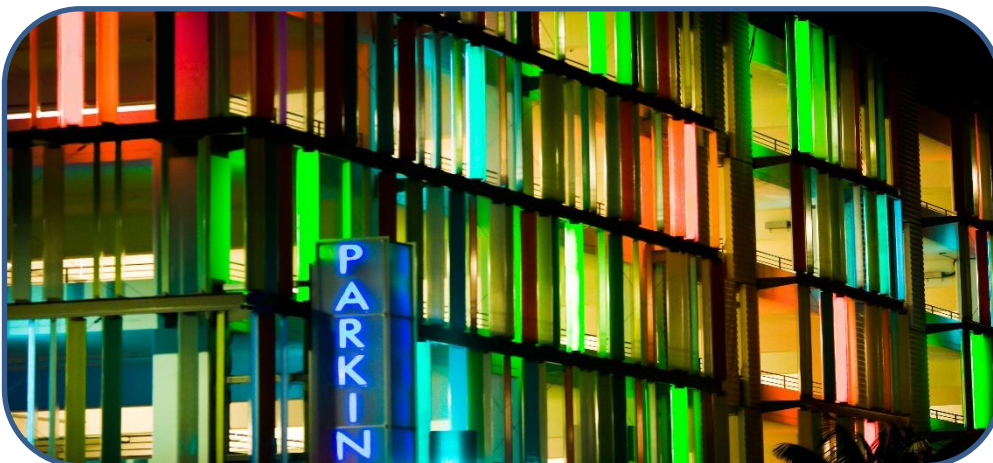



EVO PROFILE BFSW IP

PHYSICAL INFORMATION

Fixture Dimensions: 372.9X239.8X672mm

Weight: 29kg




IP Rated: IP65

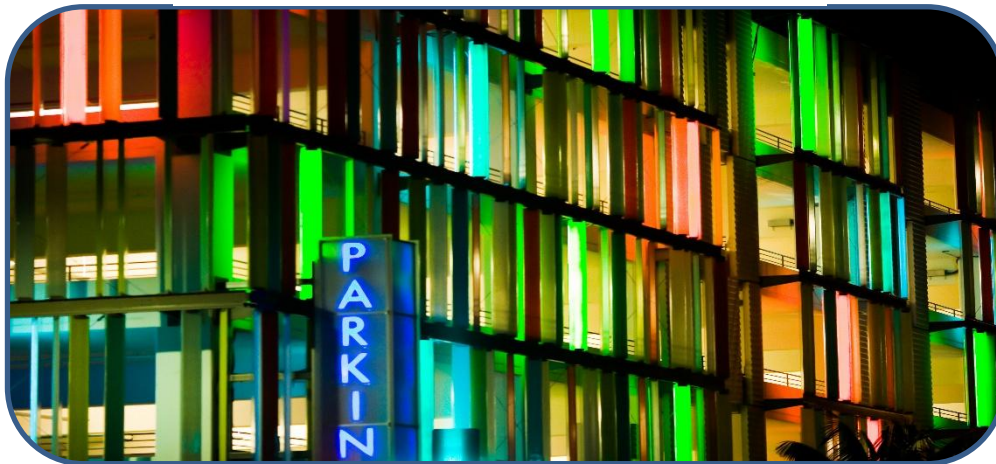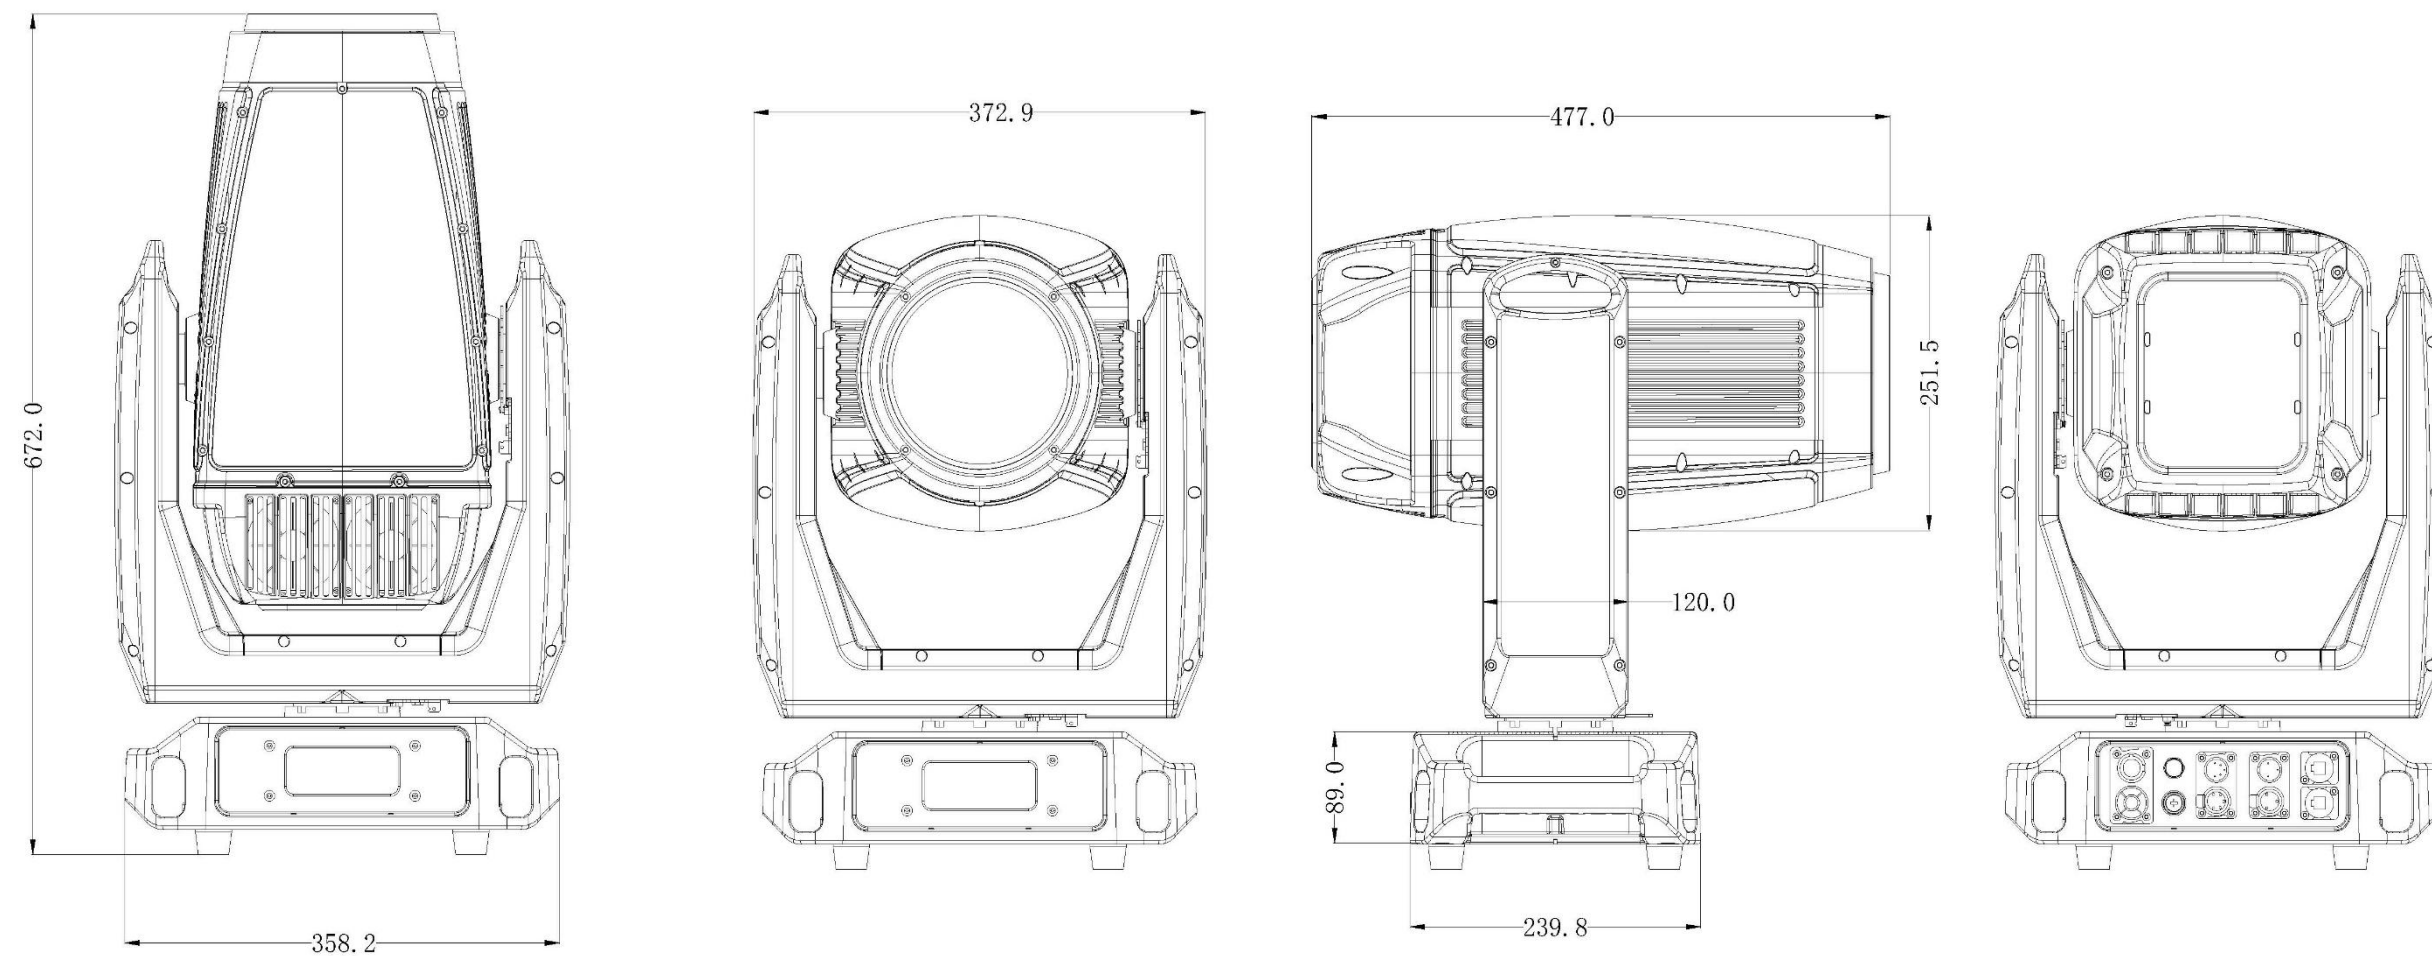

EVO PROFILE BFSW IP



unitech
digitalmedia

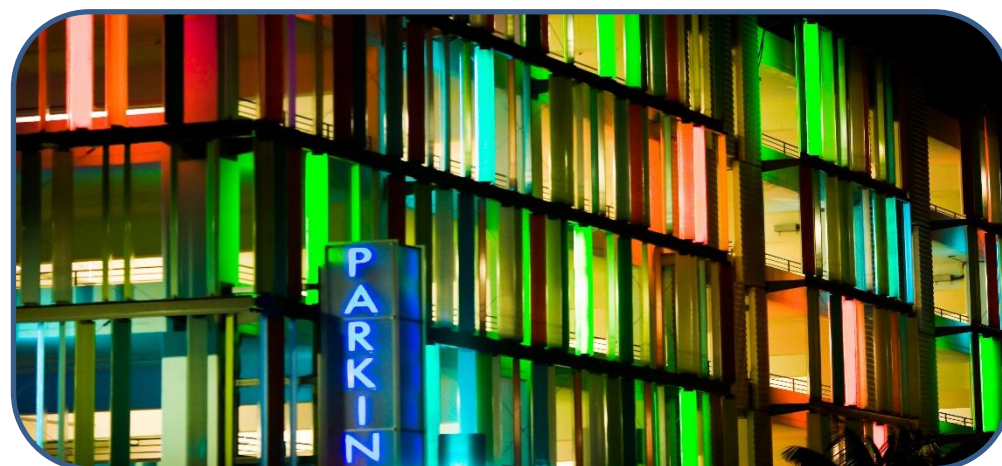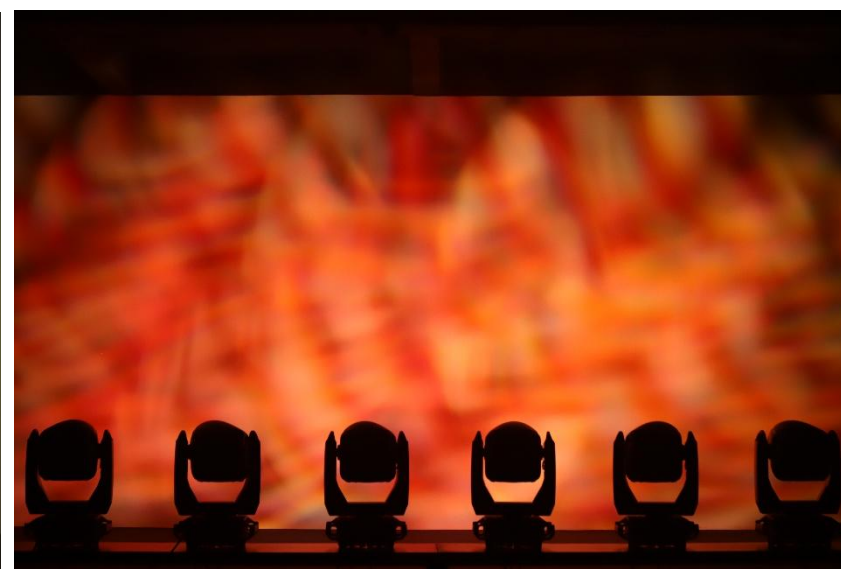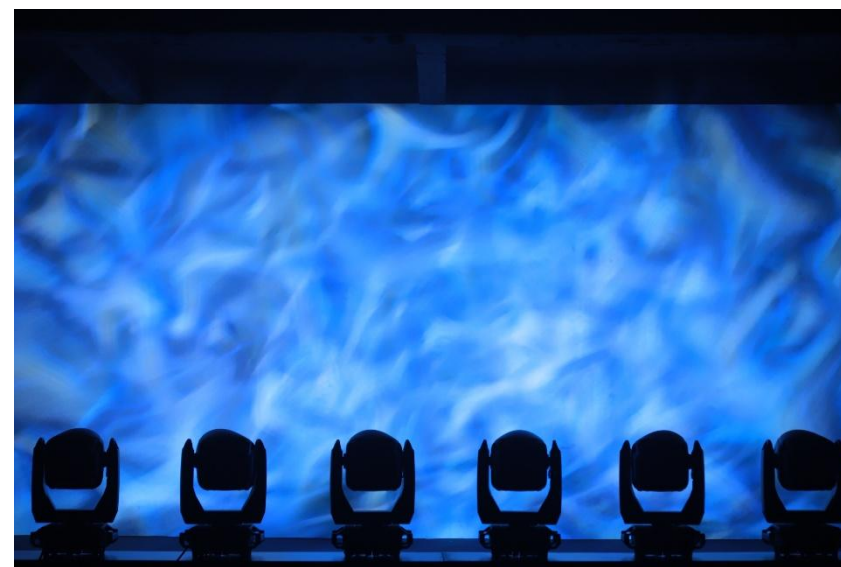

EVO PROFILE BFSW IP



ANIMATION WHEEL

A graphic animation wheel with continuous rotation in both directions, used alone or in combination with gobos to create the splendid Water wave effect, and can be changed into other wheels

ANIMATION WHEEL



Effects Wheel

PRISM

2 Combinable Rotating and Indexable
Prisms: 4-facet prism and 4-mirror, rotatable in both directions

PRISM




4-facet Prism 4-row Mirrors

ROTATING GOBOS

1 Rotating Gobo Wheel:
8 gobos, plus open
Gobo Slot 1-7: $\Phi 20\text{mm}$, Image: $\Phi 12\text{mm}$,
Gobo Slot 8: $\Phi 20\text{mm}$

ROTATING GOBOS

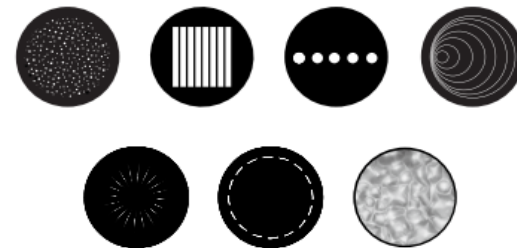

FROST FILTER

1 combinable light frost filter and 1 combinable medium frost filter

STATIC GOBOS

1 Static Gobo Wheel:
13 gobos, plus open
Gobo: $\Phi 17\text{mm}$, Image: $\Phi 13\text{mm}$


STATIC GOBOS



COLORS

Linear CMY color mixing
Linear CTO Color
Correction: 2,700K-7,000K
1 Color Wheel: 6 colors+CTB, plus open



CMY+6 COLORS

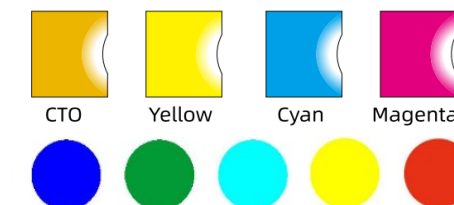

FRAMING WHEEL

Four set of framing set Blades
Endless rotation, graphic at different size and shape
Full curtain effect

FRAMING WHEEL

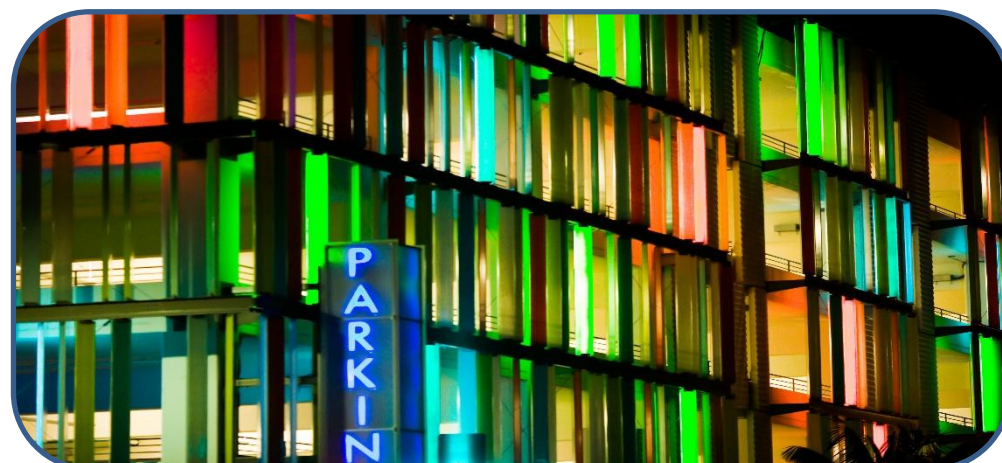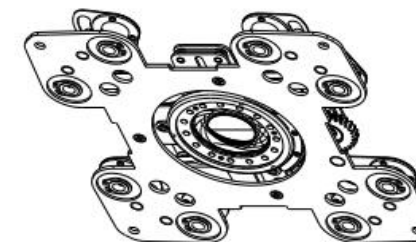



EVO PROFILE BFSW IP




OPTICAL SYSTEM

Zoom Range:4.5°-50°
Standard Mode:Ra>70
HCRI Mode:Ra≥90
Diameter of Frontal Lens:145mm

Full On (lux)	121000	46100	18900	13200
				
Irradiation distance	5m	8m	10m	15m
Spot diameter	0.40m	0.64m	0.83m	1.25m

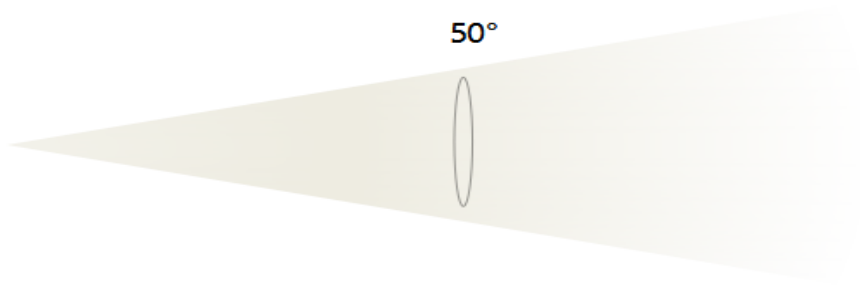Full On (lux)	2250	804	504	266
				
Irradiation distance	5m	8m	10m	15m
Spot diameter	4.53m	7.35m	9.10m	13.5m

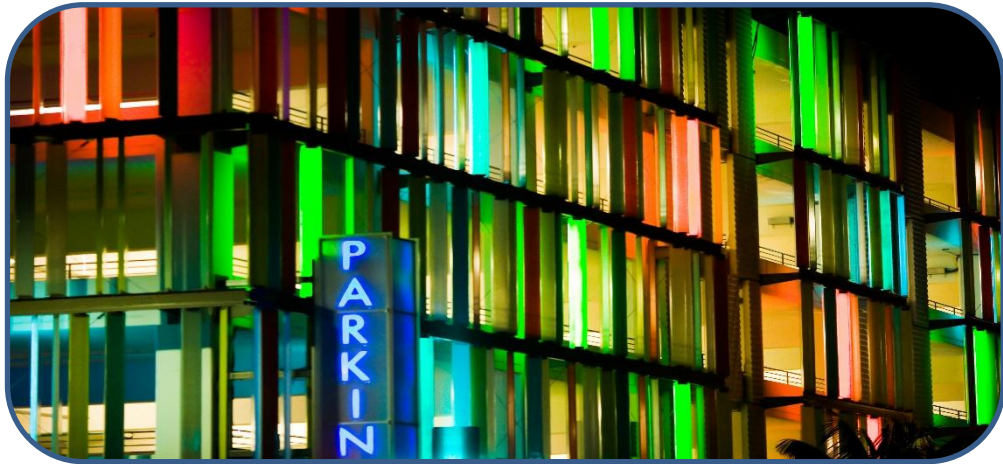

EVO PROFILE BFSW IP



ORDERS CODE:



NAME: EVO PROFILE BFSW IP
Net Weight: 29 Kg
Size: 372.9X239.8X5672 mm

PART#: UNIEVOBFSWIP



NAME: GANCIO ALISCAFF
Net Weight: 0.548 Kg
MAX.load: 200Kg

PART#: UNIALISCMONO200KG



NAME: FLY CASE EVO 1960 WB IP PIX RGBW
Q'TY: 02 PCS
N.W.: 50 Kg
MEAS: 700x530x780 mm
PART#: UNIFLYCSEVO1960

